


## LINETRAXX® VMD258

Undervoltage/overvoltage relay for monitoring  
three-phase AC systems (window function)



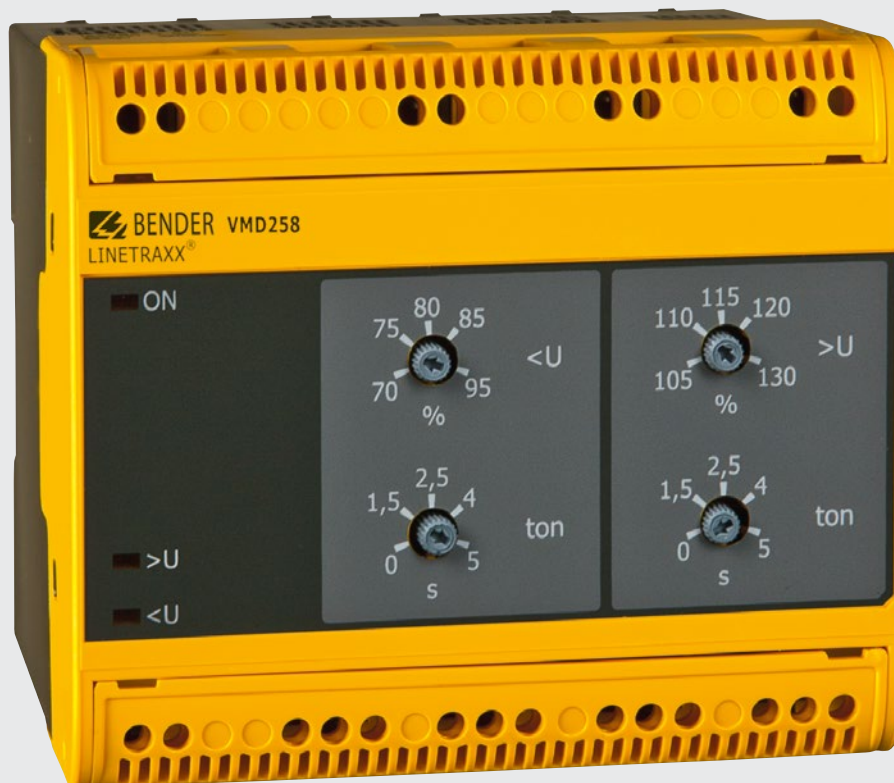

LINETRAXX® VMD258

### Device features

- Undervoltage and overvoltage monitoring for 3AC systems
- No separate supply voltage required
- Separate alarm relays for undervoltage and overvoltage with two potential-free changeover contacts
- Adjustable response value:  
0.7...0.95 x  $U_n$ /1.05...1.3 x  $U_n$
- Nominal system voltages:  
3AC 690/500/480/440/400/230/110/100 V
- Adjustable response delay: 0...5 s
- LEDs for operation, overvoltage, undervoltage

### Product description

The voltage relay VMD258 monitors three-phase AC systems for undervoltage and overvoltage (window function). Neutral conductor connection is not required, therefore it is suitable for 3AC systems.

The voltage to supply the electronics is taken from the system to be monitored. The supply of the electronics, the relays and the connection for the external energy storage device are isolated from the system by means of double isolation. Special input transformers attenuate interferences from the system.

The response values for undervoltage and overvoltage as well as the response delays are continuously adjustable.

Replaces the SUR35x series.

### Function

When the relay is connected to the mains, within the preset response values, the alarm relays **K1/K2** for undervoltage are in N/C operation (relay **energised**) and the alarm relays **K3/K4** for overvoltage are in N/O operation (relay **deenergised**).

When the value of the nominal system voltage  $U_n$  falls below the set response value  $<U_n$ , the alarm LED " $<U$ " lights up and the alarm relays K1/K2 switch once the set response delay has elapsed.


When the value of the nominal system voltage exceeds  $U_n$  the set response value  $>U_n$ , the alarm LED " $>U$ " lights up and the alarm relays K3/K4 switch once the response delay has elapsed.

Once the response values are within the set response range again, the VMD258 switches back to the initial state after approx. 100 ms.


### Standards

The LINETRAXX® VMD258 series complies with the requirements of the device standards: DIN EN 60255-1 VDE 0435-300 und E DIN IEC 60255-127 VDE 0435-3127.

**Operating elements**

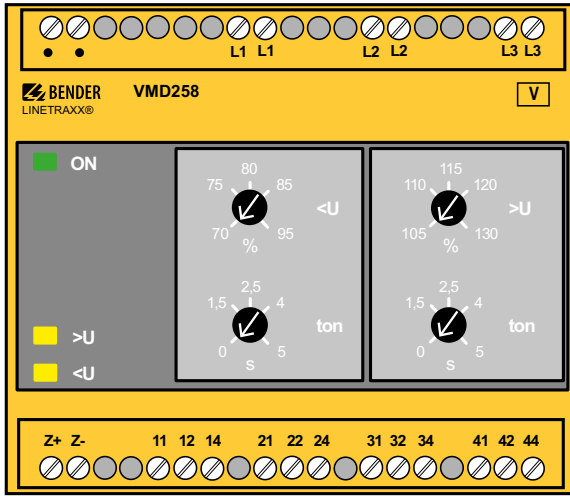

**Wiring diagram**

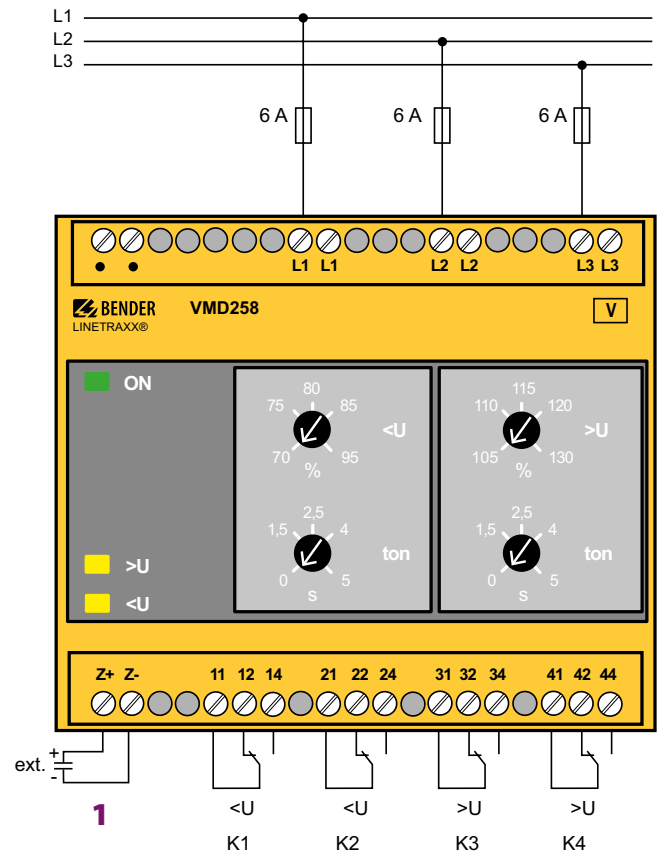

1 - Z+ and Z-: Connection ES258 for a backup time of > 5 s

**Ordering details**


Connection	Type	Art. No.
3AC, 100V	VMD258 3AC 100 V	B 9301 0060
3AC, 110V	VMD258 3AC 110 V	B 9301 0061
3AC, 230V	VMD258 3AC 230 V	B 9301 0062
3AC, 400V	VMD258 3AC 400 V	B 9301 0063
3AC, 440V	VMD258 3AC 440 V	B 9301 0064
3AC, 480V	VMD258 3AC 480 V	B 9301 0065
3AC, 500V	VMD258 3AC 500 V	B 9301 0066
3AC, 690V	VMD258 3AC 690 V	B 9301 0067

**Accessories**

Type designation	Art. No.
Additional mounting clips (screw mounting)	B 9806 0008
Energy backup ES258	B 9301 0068


**Dimension diagram**

Dimensions in mm

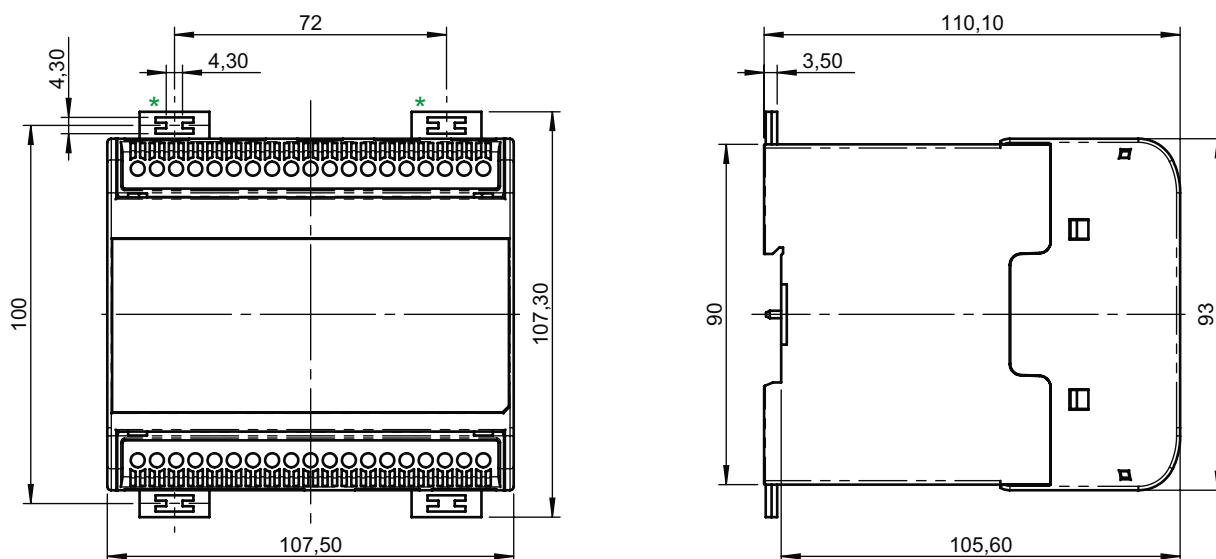

\* Upper mounting clips only for screw mounting required

**Dependent time characteristic**

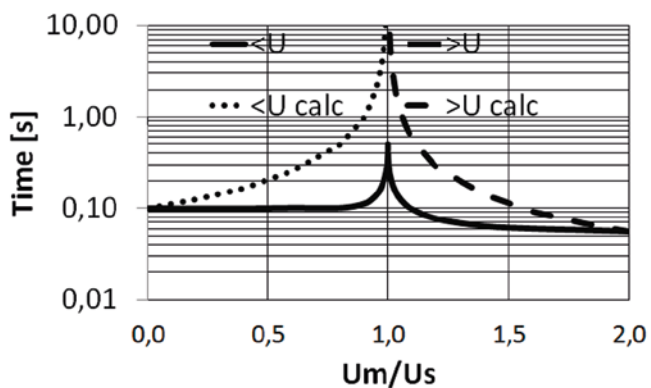

$U_m$ : measured value of voltage

$U_s$ : switching threshold

$U_{calc}$ : value calculated according to the following formula

Undervoltage  $t_{U_m} = T / (1 - (U_m / U_s))$

Overvoltage  $t_{U_m} = T / ((U_m / U_s) - 1)$

**Technical data**
**Insulation coordination acc. to DIN EN 60255-27**

Supply voltage $U_s$ AC (V)	690	480/500	400/440	230	100/110
Rated voltage AC (V)	1000	1000	600	300	150
Rated impulse voltage (kV)	12	12	8	6	4
Pollution degree	3				
Overvoltage category	III				

**Voltage ranges**

Frequency range of $U_s$	45...66 Hz				
Operating range	0.5...1.5 x $U_s$				
Nominal supply voltage $U_s$ 3AC (V)	690	500	480	440	400
Power consumption at 50 Hz, 1,3 x $U_s$ (VA)	19	15	12	14	9
Power consumption at bei 60 Hz, 1,3 x $U_s$ (VA)	11	9	8	8	6
					9
					9
					7

**Measuring circuit**

Nominal system voltage $U_n$	3AC 690/500/480/440/400/230/110/100 V
Setting range	0.7...1.3 x $U_n$
Frequency range $f_n$	45...66 Hz
Max. permissible measuring voltage	1.5 x $U_n$
Response value $U_n$ adjustable	> $U_n$ , < $U_n$

**Response values**

Undervoltage < $U$ (alarm)	0.7...0.95 x $U_n$
Overvoltage > $U$ (alarm)	1.05...1.3 x $U_n$
Relative uncertainty at the setting limits	45...66 Hz: $\pm 3\%$ 47,5...63 Hz: $\pm 2\%$
Hysteresis	< 3 %
Repetition accuracy	$\pm 1\%$
LED ON	LED (green)
Alarm for < $U$	LED (yellow)
Alarm for > $U$	LED (yellow)

**Time response**

Start-up delay $t$	500 ms $\pm 20\%$
Response delay $t_{on}$	0...5 s $\pm 10\%$
Delay on release $t_{off}$	100 ms $\pm 20\%$
Operating time $t_{ae}$ at overvoltage	60 ms* $\pm 20\%$
Operating time $t_{ae}$ at undervoltage	100 ms** $\pm 20\%$
Response time $t_{an}$	$t_{an} = t_{ae} + t_{on}$
Long-term influence	-10 %
Overshoot time $t_{ov}$	< 60 ms

**Connection for external energy storage device**

$U_{min}$	DC 24 V
$U_{max}$	DC 68 V
$U_{typ}$ at 1.0 x $U_n$	42...47 V $\pm 15\%$
Short-circuit proof (Z+, Z-)	short time yes

**Switching elements**

Number of switching elements	2 x 2 changeover contacts
Operating mode	N/C operation (undervoltage) N/O operation (overvoltage)
Electrical endurance, number of cycles	10000
Contact data acc. to IEC 60947-5-1	
Rated operational voltage AC	230 V/230 V
Utilisation category	AC-13/AC-14
Rated operational current AC	5 A/3 A
Rated operational voltage DC	220/110/24 V
Utilisation category	DC12
Rated operational current DC	1/0.2/0.1 A
Minimum current	1 mA at AC/DC > 10 V

**Environment/EMC**

EMC immunity	acc. to IEC 60255-26
EMC emission	acc. to IEC 60255-25
Operating temperature	-20...+70 °C
Climatic class acc. to DIN IEC 60721-3-3	
Stationary use	3K5
Transport	2K3
Long-term storage	1K4
Classification of mechanical conditions acc. to IEC 60721	
Stationary use	3M4
Transport	2M2
Long-term storage	1M3
Requirements acc. to IEC 60255	Class 2

**Connection**

Connection	screw terminals
Connection properties	
rigid/flexible	0.2...2.5 mm <sup>2</sup>
flexible with connector sleeve	0.25...2.5 mm <sup>2</sup>
without/with plastic sleeve	0.25...2.5 mm <sup>2</sup>
Conductor sizes (AWG)	24...13
Tightening torque	0.5...0.6 Nm
Current through L1L1, L2L2, L3L3	each max. 3 A

**Other**

Operating mode	continuous operation
Position	any position
Degree of protection, internal components (DIN EN 60529)	IP30
Degree of protection, terminals (DIN EN 60529)	IP20
Enclosure material	polycarbonate
Flammability class	UL94 V-0
DIN rail mounting acc. to	IEC 60715
Screw mounting	4 x M4
Weight	825 g

\* Operating time  **$t_{ae}$  overvoltage**  
Increase from 100 % to 130 %, switching threshold at 105 %

\*\* Operating time  **$t_{ae}$  undervoltage**  
Decrease from 100 % to 0 %, switching threshold at 95 %



**Bender GmbH & Co. KG**

P.O. Box 1161 • 35301 Gruenberg • Germany  
Londorfer Strasse 65 • 35305 Gruenberg • Germany  
Tel.: +49 6401 807-0 • Fax: +49 6401 807-259  
E-Mail: [info@bender.de](mailto:info@bender.de) • [www.bender.de](http://www.bender.de)



**BENDER Group**