



Double-Deck Fuse Disconnect Terminal Blocks with Pivoting Fuse Holder 2.5 (4) mm², 2002 Series

| | |
|--|--|
| <p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 250 V/6 kV/3 ② I_N 6.3 A</p> <p>Terminal block width 6.2 mm / 0.244 in 10 - 12 mm / 0.43 in ③</p> | <p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 250 V/6 kV/3 ② I_N 6.3 A</p> <p>Terminal block width 6.2 mm / 0.244 in 10 - 12 mm / 0.43 in ③</p> |
|--|--|

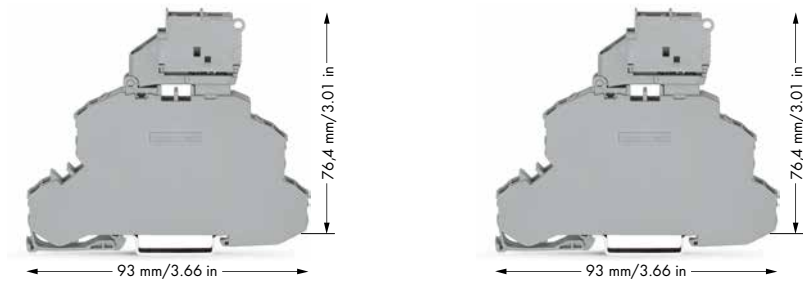

- ① Conductor sizes: 0.25 mm² - 4 mm² "s + f-st"; Push-in conductor sizes: 0.75 mm² - 4 mm² "s" and 0.75 mm² - 2.5 mm² "insulated ferrule, 1.2 mm"
- ② 250 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(see Full Line Catalog, Volume 1, Section 14)
- ③ Strip length, see packaging or instructions.
- ④ See application notes in Full Line Catalog, Volume 1, for:
Vertical jumper, page 142
- ⑤ Protective warning marker and insulation stop must be applied individually.
- ⑥ Due to the 6.2 mm width of fuse terminal blocks with pivoting fuse holder, 2004 Series jumpers must be used.

| Item No. | Pack. Unit | Item No. | Pack. Unit | | |
|--|------------|---|-------------|--------------------|----|
| Double-deck fuse disconnect terminal block with pivoting fuse holder, Through/fuse terminal block, for miniature metric fuses 5 x 20 mm, without blown fuse indication Nominal voltage and current are given by the fuse. | | Double-deck fuse disconnect terminal block with pivoting fuse holder, Through/fuse terminal block, for miniature metric fuses 5 x 20 mm, with blown fuse indication by LED, gray Nominal voltage and current are given by the LED or fuse. Leakage current in case of blown fuse: LED 2mA | | | |
| ○ L/L | 2002-2611 | 25 | ○ 12 - 30 V | 2002-2611/1000-541 | 25 |
| ○ N/L | 2002-2612 | 25 | ○ 30 - 65 V | 2002-2611/1000-542 | 25 |
| | | | ○ 230 V | 2002-2611/1000-836 | 25 |

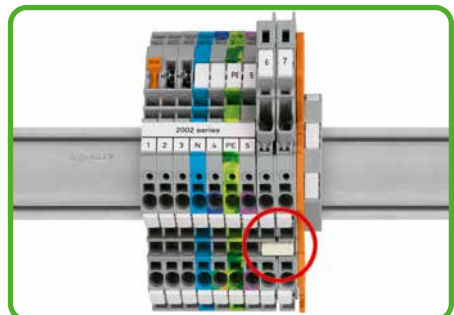


A spacer plate is supplied with all 6.2 mm wide fuse terminal blocks. Due to the 6.2 mm width of fuse terminal blocks with pivoting fuse holder, 2004 Series jumpers must be used.

2002 Series Accessories

Appropriate marking systems: WMB/Marking strips
(see Full Line Catalog, Volume 1, Section 13)

| | |
|---|--|
| End and intermediate plate, 1 mm thick orange 2002-2692 100 (4x25) gray 2002-2691 100 (4x25) | End plate for fuse terminal blocks, 2 mm thick orange 2002-1092 100 (4x25) gray 2002-1091 100 (4x25) |
| Push-in type jumper bar, insulated, I _N 32 A, light gray 2-way 2004-402 200 (8x25) 3-way 2004-403 200 (8x25) 4-way 2004-404 100 (4x25) 5-way 2004-405 100 (4x25) 6-way 2004-406 100 (4x25) 7-way 2004-407 100 (4x25) 8-way 2004-408 100 (4x25) 9-way 2004-409 100 (4x25) 10-way 2004-410 100 (4x25) | Insulation stop, ⑤ 5 pcs/strip, 0.25 - 0.5 mm ² light gray 2002-171 200 (8x25) |
| Push-in type jumper bar, insulated, I _N 32 A, light gray from 1 to 3 2004-433 200 (8x25) from 1 to 4 2004-434 200 (8x25) from 1 to 5 2004-435 100 (4x25) from 1 to 6 2004-436 100 (4x25) from 1 to 7 2004-437 100 (4x25) from 1 to 8 2004-438 100 (4x25) from 1 to 9 2004-439 100 (4x25) from 1 to 10 2004-440 100 (4x25) | Insulation stop, ⑤ 5 pcs/strip, 0.75 - 1 mm ² dark gray 2002-172 200 (8x25) |
| Double-deck vertical jumper, insulated, ④ I _N 24 A light gray 2002-492 100 (4x25) | Protective warning marker, ⑤ with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25) |
| | Test plug, with 500 mm cable, 2 mm Ø red 210-136 50 |
| | Test plug, with 500 mm cable, 2.3 mm Ø yellow 210-137 50 |
| | Marking strip, plain, 11 mm wide, 50 m roll white 2009-110 1 |

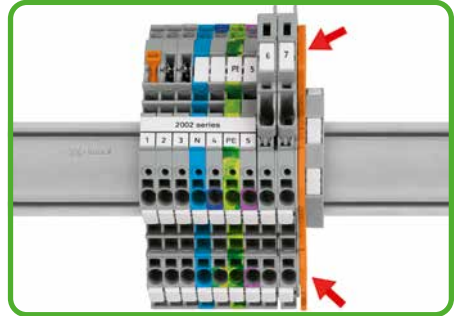

Additionally, an end plate for fuse terminal blocks (e.g., 2002-1092, orange) must be used at the end of an assembly or if there is no adjacent fuse terminal block.