


The powerful ones offering so many advantages

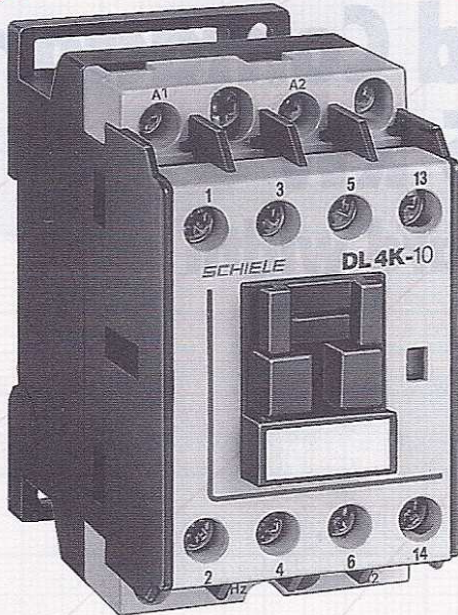

Environment friendly

- cadmium free contacts
- asbestos free plastic materials

Handling

- ergonomic, user friendly design
- different colouring for active and passive parts
- large clip-on front label for identification purposes
- terminals arranged for simple and quick mounting

Cost/performance

- favourable performance/cost ratio
- comprehensive range of components to complete the system family

Contact reliability

- optimum contact reliability of control circuit by the use of patented twin contacts

Contact reliability increased by the factor of 1000 to 10 000 compared to standard contacts

Connection

- ample wiring space for leads up to $2 \times 6 \text{ mm}^2 / \dots 25 \text{ mm}^2$
- coil terminations for one-sided or diagonal wiring
- coil suppressor for direct snap-on to coil terminal

Safety in operation

- finger protected to VDE 0106, Part 100

Compliance

- designed to comply with the relevant national and international standards

**modular – compact – reliable
in 45 mm industrial standard width**