



TOPJOB® S Rail-Mount Terminal Block Systems

Edition 2018



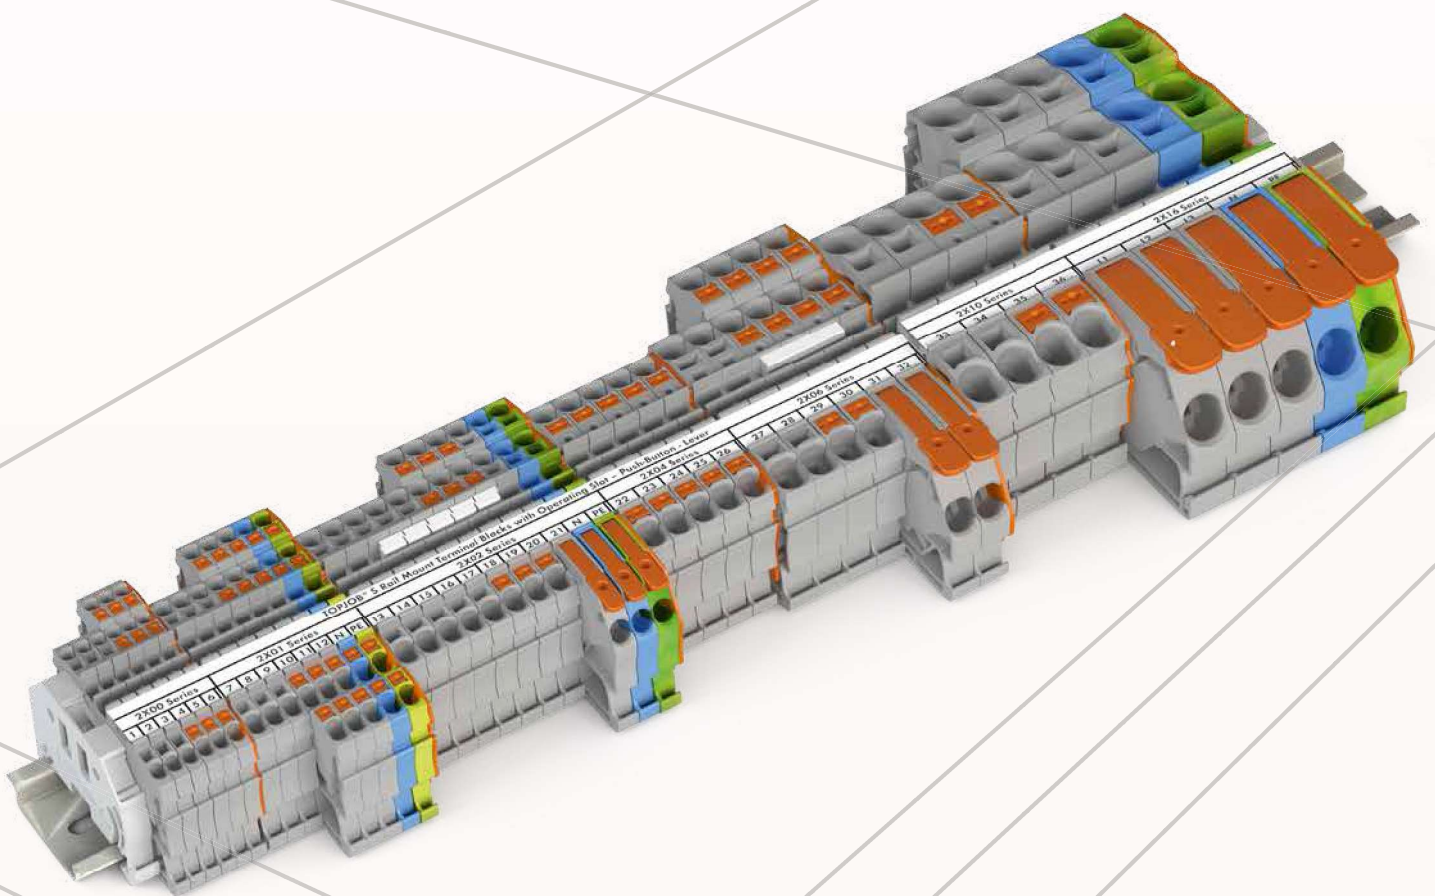

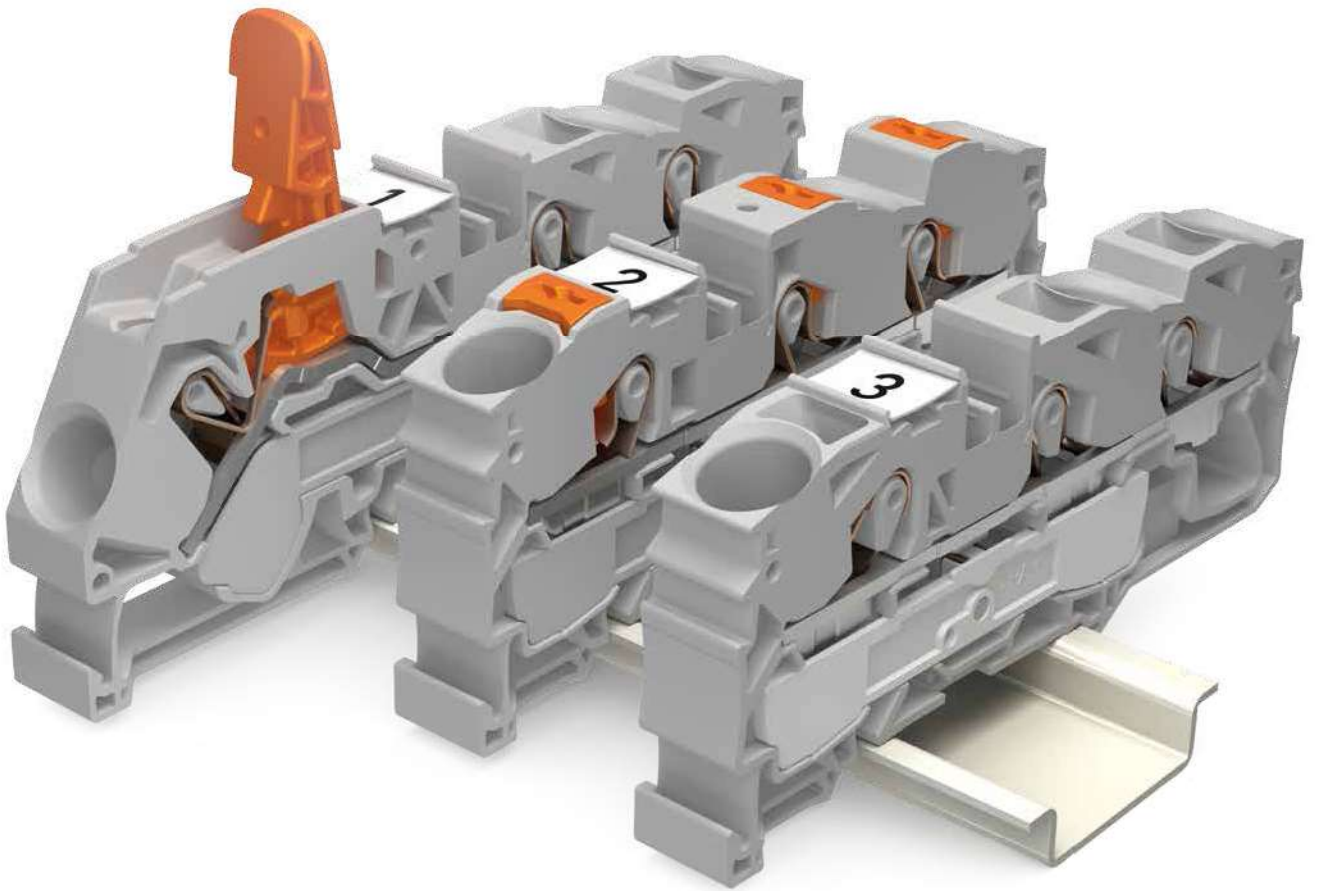












TOPJOB® S

The Rail-Mount Terminal Block System

| | | Page |
|--|---|---------------------------|
|  | Through and Ground Conductor Terminal Blocks with Levers and Push-in CAGE CLAMP® | 2102/2106/2116 Series |
| | Through and Ground Conductor Terminal Blocks with Levers and Push-Buttons | 2102/2106/2116 Series |
| | 0.25 ... 16 (25 "f-st") mm ² (22 ... 4 AWG) | 8 |
|  | Through and Ground Conductor Terminal Blocks with Push-Buttons | 2200 ... 2216 Series |
| | 0.14 ... 16 (25 "f-st") mm ² (24 ... 4 AWG) | 11 |
|  | Through, Ground/Shield Conductor and Ex Terminal Blocks | 2000 ... 2016 Series |
| | 0.14 ... 16 (25 "f-st") mm ² (24 ... 4 AWG) | 32 |
| | Multilevel Rail-Mount Terminal Blocks | 2000/2002 Series |
| | 1 (1.5) mm ² (16 AWG) and 2.5 (4) mm ² (12 AWG) | 46 |
|  | Disconnect/Test/Fuse Terminal Blocks and Through Terminal Blocks of Same Profile | 2002 and 2006/2007 Series |
| | Fused Disconnect Terminal Blocks with a Pivoting Fuse Holder | 72 |
| | 0.25 ... 2.5 (4) mm ² (22 ... 12 AWG) and 0.5 ... 6 (10) mm ² (20 ... 8 AWG) | |
|  | Fuse Plugs on Carrier Terminal Blocks | 2004/2006 Series |
| | | 106 |
|  | Sensor and Actuator Terminal Blocks | 2000/2020 Series |
| | 0.14 ... 1 (1.5) mm ² (24 ... 16 AWG) | 112 |
|  | Diode and LED Terminal Blocks | 2001/2002/2004 Series |
| | 0.25 ... 4 (6) mm ² (22 ... 10 AWG) | 120 |
| | Multilevel Diode and LED Terminal Blocks | 2002 Series |
| | 0.25 ... 2.5 (4) mm ² (22 ... 12 AWG) | 126 |
|  | Diode, LED Modules and Empty Component Plug Housings | 2002 Series |
| | | 130 |
|  | X-COM®S-SYSTEM-MINI | 2020 Series |
| | Through and Ground Conductor Carrier Terminal Blocks and Double-Deck Carrier Terminal Blocks | 158 |
| | 0.14 ... 1 (1.5) mm ² (24 ... 16 AWG) | |
|  | 1- and 2-Conductor Female Plugs | 2020 Series |
| | Female Plugs for Self-Assembly and 1- and 2- Conductor Female Plugs with Locking Levers and Strain Relief Plates | 162 |
| | 0.14 ... 1 (1.5) mm ² (24 ... 16 AWG) | |
|  | X-COM®S-SYSTEM | 2022 Series |
| | Through and Ground Conductor Carrier Terminal Blocks and Double-Deck Carrier Terminal Blocks | 174 |
| | 0.25 ... 2.5 (4) mm ² (22 ... 12 AWG) | |
|  | 1-Conductor Female Plugs | 2022 Series |
| | Female Plugs for Self-Assembly and 1-Conductor Female Plugs with Locking Levers and Strain Relief Plates | 178 |
| | 0.25 ... 2.5 (4) mm ² (22 ... 12 AWG) | |

| | | | Page |
|---|--|-------------|------|
|  | X-COM®S-SYSTEM, for Ex Applications Through and Ground Conductor Carrier Terminal Blocks and Double-Deck Carrier Terminal Blocks 0.25 ... 2.5 (4) mm ² (22 ... 12 AWG) | 2022 Series | 186 |
|  | 1-Conductor Female Plugs 0.25 ... 2.5 (4) mm ² (22 ... 12 AWG) | 2022 Series | 190 |
|  | Multilevel Installation Terminal Blocks N-Disconnect Slide Links and Internal N-Disconnect 0.25 ... 2.5 (4) mm ² (22 ... 12 AWG) | 2003 Series | 196 |
|  | Multilevel Installation Terminal Blocks with N-Disconnect Slide Links 0.5 ... 4 (6) mm ² (20 ... 10 AWG) | 2005 Series | 204 |
|  | Supply Terminal Blocks for Distribution Boxes 0.5 ... 16 (25 "f-st") mm ² (20 ... 4 AWG) | 2016 Series | 208 |
|  | Accessories for Rail-Mount Terminal Blocks, TOPJOB® S | | 140 |
|  | Through and Ground Conductor Terminal Blocks 6 ... 35 mm ² (10 ... 2 AWG) | 285 Series | 214 |
|  | Through and Ground Conductor Terminal Blocks Through Terminal Blocks with Mounting Flanges 10 ... 50 (70) mm ² (8 ... 2/0 AWG) | 285 Series | 218 |
|  | Through and Ground Conductor Terminal Blocks Through Terminal Blocks with Mounting Flanges 25 ... 95 mm ² (4 ... 4/0 AWG) | 285 Series | 220 |
|  | Through and Ground Conductor Terminal Blocks Through Terminal Blocks with Mounting Flanges 50 ... 185 mm ² (1/0 AWG ... 350 kcmil) | 285 Series | 222 |
|  | Marking Systems | | 230 |
|  | Carrier Rails, Collective Jumper Carriers and Rail-Mount Terminal Block Covers Tools | | 234 |

3 WAYS TO WIRE = 1 FAMILY

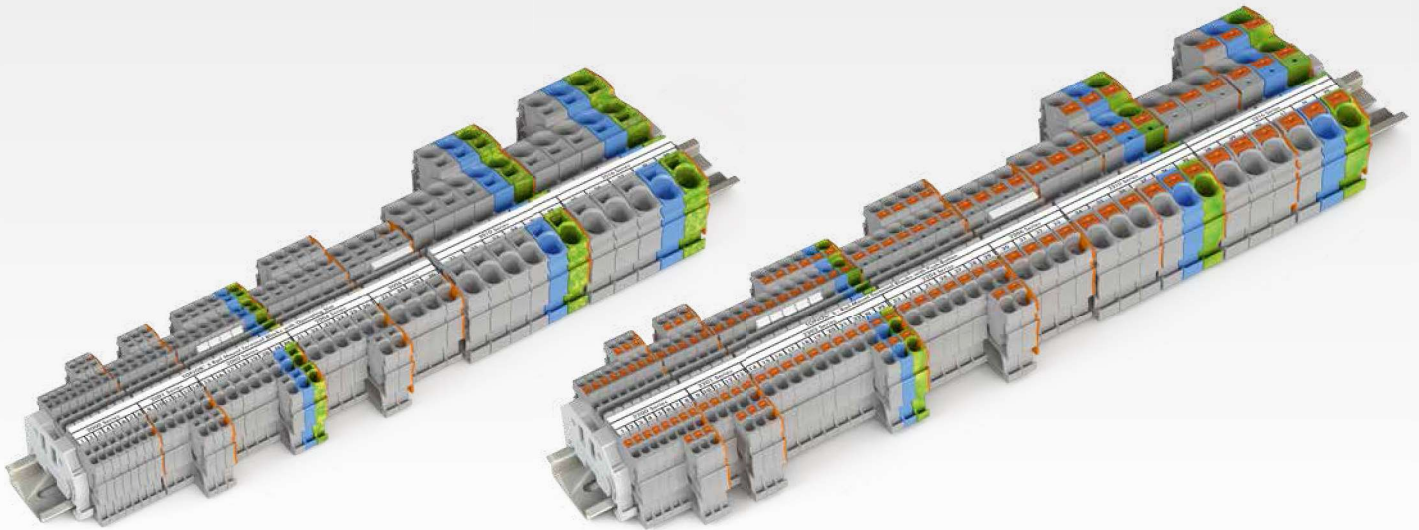


Operating Slot

- The operating tool remains in the operating slot until termination is complete
- The clamping unit is marked by the inserted operating tool
- The conductor entry is held open for hands-free wiring

Push-Button

- Use any common tool to open the clamping unit via the push-button
- Intuitive operation – orange color highlights the push-button

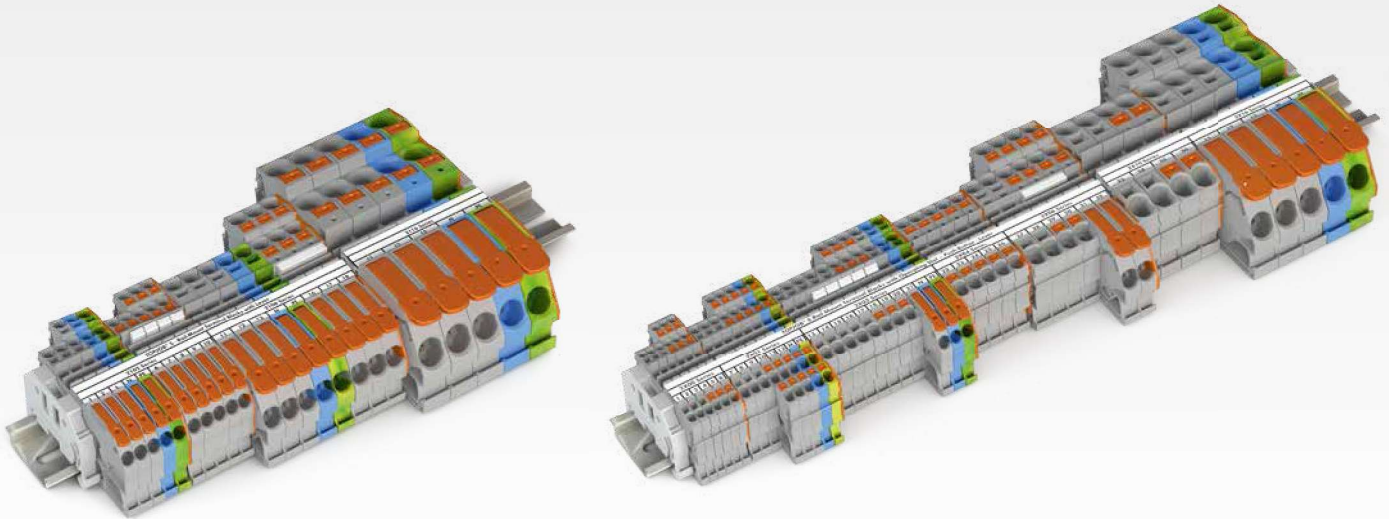


Lever

- Simple and intuitive termination by hand
- Tool-free termination and removal of all conductor types
- The lever engages and keeps the clamping point open, freeing hands for wiring
- Lever position clearly indicates if the clamping point is open or closed
- Easy connection of difficult-to-bend conductors via side-entry conductor insertion


One Range

- All three actuation variants can be combined with each other
- Push-in termination of solid, stranded and ferruled conductors for all variants
- Marking strips and WMB markers provide continuous marking possibilities
- One existing range of jumpers for all three variants
- Test options for all variants

Rail-Mount Terminal Blocks with Lever and Push-in CAGE CLAMP® 2102, 2106 and 2116 Series Description and Installation

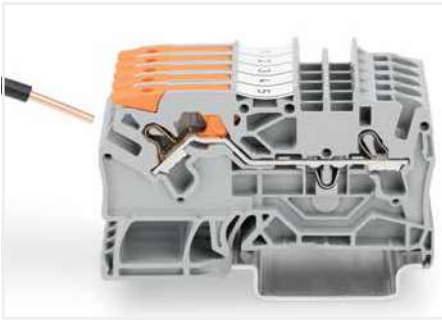

Push-in termination of solid conductors

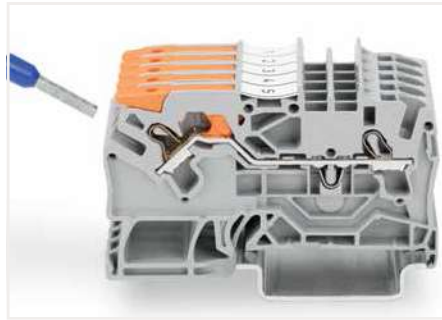

Push-in termination of ferruled conductors





Pull the lever up until it stops, then connect the stranded conductor.



Push the lever back down – done!



Insert push-in type jumper bar and push down until it hits backstop.

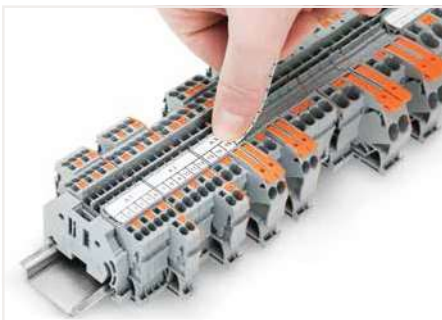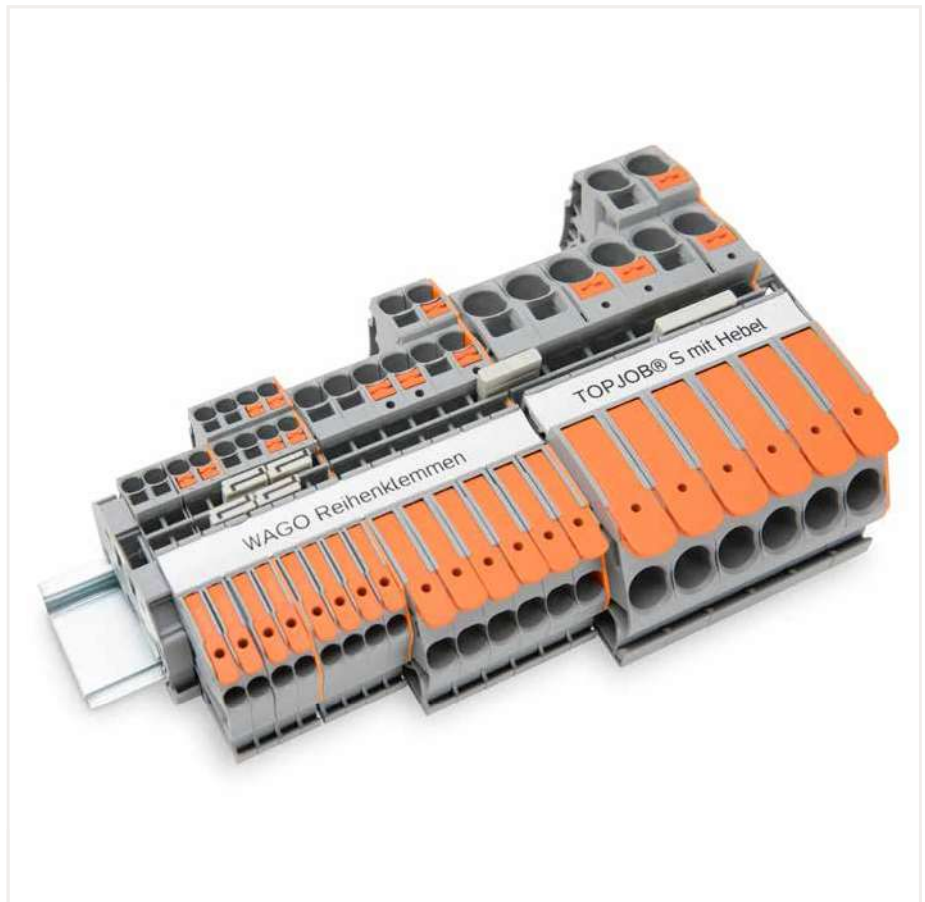

Marking strips:
Snapping a strip into the marker slots.



WMB Inline markers:
Snapping a strip into the marker slots.



Testing with a 2 mm Ø test plug, max. 42 V



Push-in CAGE CLAMP® terminates the following copper conductors:
solid



stranded



fine-stranded,
also with tinned
single strands

Rail-Mount Terminal Blocks with Push-Button and Push-in CAGE CLAMP®

2200 to 2216 Series

Description and Installation



Push-in termination of solid and ferruled conductors



Terminating fine-stranded conductors via operating tool




Removing all conductors via operating tool



Insert push-in type jumper bar and push down until it hits backstop.



Commoning with step-down jumpers

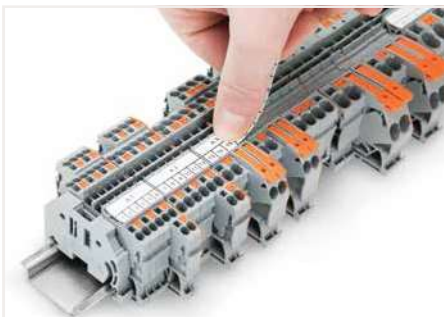

Marking strips:
Snapping a strip into the marker slots.



WMB Inline markers:
Snapping a strip into the marker slots.



Testing with a 2 mm Ø test plug, max. 42 V



fine-stranded,
tip-bonded



fine-stranded,
with ferrule
(gastight crimped)




fine-stranded,
with pin terminal
(gastight crimped)

Through and Ground Conductor Terminal Block; with Levers and Push-in CAGE CLAMP® TOPJOB® S; 2.5 (4) mm²; 2102 Series


Technical Data

0.25 ... 2.5 (4) mm² ① | 22 ... 12 AWG
800 V/8 kV/3 ②
I_N 24 A (32 A)
Terminal block width: 5.2 mm / 0.205 inch
10 ... 12 mm / 0.39 ... 0.47 inch



Technical Data

0.25 ... 2.5 (4) mm² ① | 22 ... 12 AWG
800 V/8 kV/3 ②
I_N 24 A (30 A)
Terminal block width: 5.2 mm / 0.205 inch
10 ... 12 mm / 0.39 ... 0.47 inch

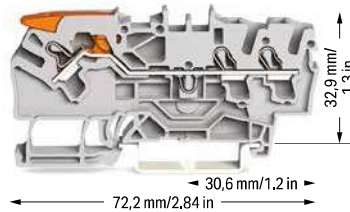

2-conductor through terminal block; with lever and Push-in CAGE CLAMP®

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2102-1201 | 100 |
| blue | 2102-1204 ③ | 100 |

2-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

| | | |
|--------------|-----------|-----|
| green-yellow | 2102-1207 | 100 |
|--------------|-----------|-----|

Accessories; item-specific

End and intermediate plate; 0.8 mm thick

| | | |
|--------|-----------|----------|
| orange | 2102-1292 | 100 (25) |
| gray | 2102-1291 | 100 (25) |

Accessories; 2102 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm²

| | | |
|------------|----------|----------|
| light gray | 2002-171 | 200 (25) |
|------------|----------|----------|

Insulation stop; 5 pcs/strip; 0.75 ... 1 mm²

| | | |
|-----------|----------|----------|
| dark gray | 2002-172 | 200 (25) |
|-----------|----------|----------|

Protective warning marker; with black high-voltage symbol; for 5 terminal blocks

| | | |
|--------|----------|----------|
| yellow | 2002-115 | 100 (25) |
|--------|----------|----------|

Push-in type jumper bar; insulated; I_N 25 A; light gray

| | | |
|--------|----------|----|
| 2-way | 2002-402 | 25 |
| 3-way | 2002-403 | 25 |
| 4-way | 2002-404 | 25 |
| 5-way | 2002-405 | 25 |
| 6-way | 2002-406 | 25 |
| 7-way | 2002-407 | 25 |
| 8-way | 2002-408 | 25 |
| 9-way | 2002-409 | 25 |
| 10-way | 2002-410 | 25 |

Delta jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|-------------|------------------|----|
| 1-2 3-4 5-6 | 2002-406/020-000 | 25 |
|-------------|------------------|----|

Star point jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|-------|------------------|----|
| 1-3-5 | 2002-405/011-000 | 25 |
|-------|------------------|----|

3-conductor through terminal block; with lever and Push-in CAGE CLAMP®

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2102-1301 | 100 |
| blue | 2102-1304 ③ | 100 |

3-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

| | | |
|--------------|-----------|-----|
| green-yellow | 2102-1307 | 100 |
|--------------|-----------|-----|

Accessories; item-specific

End and intermediate plate; 0.8 mm thick

| | | |
|--------|-----------|----------|
| orange | 2102-1392 | 100 (25) |
| gray | 2102-1391 | 100 (25) |

Push-in type jumper bar; insulated; I_N 25 A; light gray

| | | |
|---------|----------|----|
| 1 to 3 | 2002-433 | 25 |
| 1 to 4 | 2002-434 | 25 |
| 1 to 5 | 2002-435 | 25 |
| 1 to 6 | 2002-436 | 25 |
| 1 to 7 | 2002-437 | 25 |
| 1 to 8 | 2002-438 | 25 |
| 1 to 9 | 2002-439 | 25 |
| 1 to 10 | 2002-440 | 25 |

Adjacent jumper for continuous commoning; insulated; I_N 25 A; light gray

| | | |
|-------|----------|----|
| 2-way | 2002-400 | 25 |
|-------|----------|----|

Adjacent jumper for continuous commoning; insulated; I_N 25 A; 1 to 3

| | | |
|------------|------------------|----|
| light gray | 2002-423 | 25 |
| red | 2002-423/000-005 | 25 |
| blue | 2002-423/000-006 | 25 |

Adjacent jumper for continuous commoning; insulated; I_N 25 A; light gray

| | | |
|-------|----------|----|
| 5-way | 2002-415 | 25 |
|-------|----------|----|

Push-in type wire jumper; insulated; 1.5 mm² conductor cross-section; I_N 18 A

| | | |
|------------|----------|----------|
| L = 60 mm | 2009-412 | 100 (10) |
| L = 110 mm | 2009-414 | 100 (10) |
| L = 250 mm | 2009-416 | 100 (10) |

① Conductor range: 0.25 ... 4 mm² "s+f-st"
Push-in termination: 0.75 ... 4 mm² "s"
and 0.75 ... 2.5 mm²
"insulated ferrules, 12 mm"

② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree

③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

" Please observe the application notes:
Jumpers, from page 146
Testing accessories, from page 140
Marking, from page 230

" Approvals and corresponding ratings,
visit www.wago.com

Accessories; 2102 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Staggered jumper; insulated; I_N 25 A; light gray

| | | |
|--------|----------|----|
| 2-way | 2002-472 | 25 |
| 3-way | 2002-473 | 25 |
| 4-way | 2002-474 | 25 |
| 5-way | 2002-475 | 25 |
| 6-way | 2002-476 | 25 |
| 7-way | 2002-477 | 25 |
| 8-way | 2002-478 | 25 |
| 9-way | 2002-479 | 25 |
| 10-way | 2002-480 | 25 |
| 11-way | 2002-481 | 25 |
| 12-way | 2002-482 | 25 |

Customized staggered jumper; insulated; with contact lugs broken off at the factory and circuit printing; I_N 25 A; light gray

| | | |
|--------------|------------------|----|
| 1-3 | 2002-473/011-000 | 25 |
| 1-3-5 | 2002-475/011-000 | 25 |
| 1-3-5-7 | 2002-477/011-000 | 25 |
| 1-3-5-7-9 | 2002-479/011-000 | 25 |
| 1-3-5-7-9-11 | 2002-481/011-000 | 25 |

Modular TOPJOB® S connector; snaps together; for jumper contact slot

| | | |
|------|----------|----------|
| gray | 2002-511 | 100 (25) |
|------|----------|----------|

TOPJOB® S L-type test plug module; snaps together

| | | |
|------|----------|----------|
| gray | 2002-611 | 100 (25) |
|------|----------|----------|

WMB Inline, plain; 1,500 WMB markers (5 mm)/reel; 5 ... 5.2 mm stretchable

| | | |
|-------|----------|---|
| white | 2009-115 | 1 |
|-------|----------|---|

Marking strip; plain; 11 mm wide; 50 m reel

| | | |
|-------|----------|---|
| white | 2009-110 | 1 |
|-------|----------|---|

WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm

| | | |
|-------|----------|---|
| plain | 793-5501 | 5 |
|-------|----------|---|

Through and Ground Conductor Terminal Block; with Levers and Push-in CAGE CLAMP® TOPJOB® S; 6 (10) mm²; 2106 Series

Technical Data

0.5 ... 6 (10) mm² ① | 20 ... 8 AWG

800 V/8 kV/3 ②

I_N 41 A (55 A)

Terminal block width: 7.5 mm / 0.295 inch

 13 ... 15 mm / 0.51 ... 0.59 inch


Technical Data

0.5 ... 6 (10) mm² ① | 20 ... 8 AWG

800 V/8 kV/3 ②

I_N 41 A (55 A)

Terminal block width: 7.5 mm / 0.295 inch

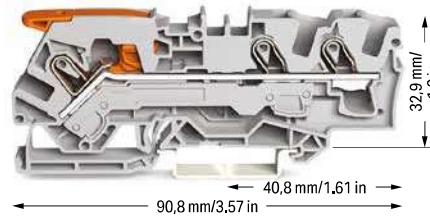 13 ... 15 mm / 0.51 ... 0.59 inch


2-conductor through terminal block; with lever and Push-in CAGE CLAMP®

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2106-1201 | 50 |
| blue | 2106-1204 ③ | 50 |

3-conductor through terminal block; with lever and Push-in CAGE CLAMP®

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2106-1301 | 25 |
| blue | 2106-1304 ③ | 25 |

2-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

| | | |
|--------------|-----------|----|
| green-yellow | 2106-1207 | 50 |
|--------------|-----------|----|

3-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

| | | |
|--------------|-----------|----|
| green-yellow | 2106-1307 | 25 |
|--------------|-----------|----|

Accessories; item-specific

End and intermediate plate; 1 mm thick

| | | |
|--------|-----------|----------|
| orange | 2106-1292 | 100 (25) |
| gray | 2106-1291 | 100 (25) |

Accessories; item-specific

End and intermediate plate; 1 mm thick

| | | |
|--------|-----------|----------|
| orange | 2106-1392 | 100 (25) |
| gray | 2106-1391 | 100 (25) |

Accessories; 2106 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Push-in type jumper bar; insulated; I_N 41 A; light gray

| | | |
|---|----------|----|
|  2-way | 2006-402 | 25 |
|  3-way | 2006-403 | 25 |
|  4-way | 2006-404 | 25 |
|  5-way | 2006-405 | 25 |

Push-in type jumper bar; insulated; I_N 41 A; light gray

| | | |
|--|----------|----|
|  1 to 3 | 2006-433 | 25 |
|  1 to 4 | 2006-434 | 25 |
|  1 to 5 | 2006-435 | 25 |

Star point jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|---|------------------|----|
|  1-3-5 | 2006-405/011-000 | 25 |
|---|------------------|----|

Protective warning marker; with black high-voltage symbol; for 5 terminal blocks

| | | |
|--|----------|----------|
|  yellow | 2006-115 | 100 (25) |
|--|----------|----------|

Lockout cap; for conductor entry and operating slot

| | | |
|--|----------|----|
|  gray | 2006-191 | 25 |
|--|----------|----|

Modular TOPJOB® S connector; snaps together; for jumper contact slot

| | | |
|--|----------|---------|
|  gray | 2006-511 | 50 (25) |
|--|----------|---------|

Test plug adapter; for 4 mm Ø test plug

| | | |
|--|----------|----------|
|  gray | 2009-174 | 100 (25) |
|--|----------|----------|

Marking strip; plain; 11 mm wide; 50 m reel

| | | |
|---|----------|---|
|  white | 2009-110 | 1 |
|---|----------|---|

WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm

| | | |
|---|----------|---|
|  plain | 793-5501 | 5 |
|---|----------|---|

① Conductor range: 0.5 ... 10 mm² "s+f-st"

Push-in termination: 1 ... 10 mm² "s" and 1.5 ... 6 mm² "insulated ferrules, 12 mm"


② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree


③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

" Please observe the application notes: Jumpers, from page 149
Testing accessories, from page 142
Marking, from page 230



" Approvals and corresponding ratings, visit www.wago.com



Through and Ground Conductor Terminal Block; with Levers and Push-in CAGE CLAMP® TOPJOB® S; 16 (25 "f-st") mm²; 2102 Series



| Technical Data | |
|--|--------------|
| 0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG |
| 800 V/8 kV/3 ② | |
| I _N 76 A (90 A) | |
| Terminal block width: 12 mm / 0.472 inch | |
|  18 ... 20 mm / 0.71 ... 0.79 inch | |

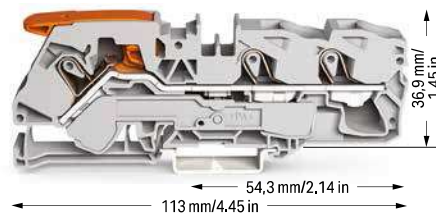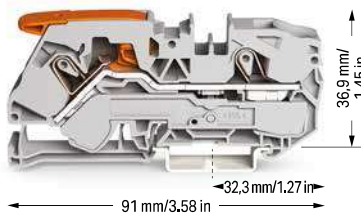
| Technical Data | |
|---|--------------|
| 0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG |
| 800 V/8 kV/3 ② | |
| I _N 76 A (90 A) | |
| Terminal block width: 12 mm / 0.472 inch | |
|  18 ... 20 mm / 0.71 ... 0.79 inch | |


- ① Conductor range: 0.5 ... 16 mm² "s+f-st", 25 mm² "f-st";
Push-in termination: 2.5 ... 16 mm² "s" and 2.5 ... 16 mm²
"insulated ferrules, 18 mm"
 - ② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
 - ③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.
- " Please observe the application notes:
Jumpers, from page 149
Testing accessories, from page 143
Marking, from page 230
- " Approvals and corresponding ratings, visit www.wago.com







| 2-conductor through terminal block; with lever and Push-in CAGE CLAMP® | | |
|---|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2116-1201 | 20 |
|  blue | 2116-1204 ③ | 20 |

| 3-conductor through terminal block; with lever and Push-in CAGE CLAMP® | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2116-1301 | 20 |
|  blue | 2116-1304 ③ | 20 |

| 2-conductor ground terminal block; with lever and Push-in CAGE CLAMP® | | |
|---|-----------|----|
|  green-yellow | 2116-1207 | 20 |




| 3-conductor ground terminal block; with lever and Push-in CAGE CLAMP® | | |
|--|-----------|----|
|  green-yellow | 2116-1307 | 20 |


| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 1 mm thick | | | |
|  | orange | 2116-1292 | 100 (25) |
|  | gray | 2116-1291 | 100 (25) |




| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 1 mm thick | | | |
|  | orange | 2116-1392 | 100 (25) |
|  | gray | 2116-1391 | 100 (25) |


Accessories; 2116 Series


Appropriate marking systems: WMB/WMB Inline/Marking Strips


| Push-in type jumper bar; insulated; I _N 41 A; light gray | | | |
|---|-------|----------|----|
|  | 2-way | 2016-402 | 25 |
|  | 3-way | 2016-403 | 25 |
|  | 4-way | 2016-404 | 25 |
|  | 5-way | 2016-405 | 25 |


| Finger guard; touch-proof cover protects unused conductor entries | | | |
|---|--------|----------|----------|
|  | yellow | 2016-100 | 100 (25) |


| Push-in type jumper bar; insulated; I _N 41 A; light gray | | | |
|---|--------|----------|----|
|  | 1 to 3 | 2016-433 | 25 |
|  | 1 to 4 | 2016-434 | 25 |
|  | 1 to 5 | 2016-435 | 25 |


| Modular TOPJOB® S connector; snaps together; for jumper contact slot | | | |
|---|------|----------|---------|
|  | gray | 2016-511 | 50 (25) |

| Star point jumper; insulated; I _N = I _N terminal block; light gray | | | |
|--|-------|------------------|----|
|  | 1-3-5 | 2016-405/011-000 | 25 |

| Test plug adapter; for 4 mm Ø test plug | | | |
|---|------|----------|----------|
|  | gray | 2009-174 | 100 (25) |

| Protective warning marker; with black high-voltage symbol; for 5 terminal blocks | | | |
|--|--------|----------|----------|
|  | yellow | 2016-115 | 100 (25) |

| Marking strip; plain; 11 mm wide; 50 m reel | | | |
|---|-------|----------|---|
|  | white | 2009-110 | 1 |

| WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm | | | |
|--|-------|----------|---|
|  | plain | 793-5501 | 5 |

Through and Ground Conductor Terminal Block; with Lever and Push-Button TOPJOB® S; 2.5 (4) mm²; 2102 Series


Technical Data

0.25 ... 2.5 (4) mm² ① | 22 ... 12 AWG

800 V/8 kV/3 ②

I_N 24 A (32 A)

Terminal block width: 5.2 mm / 0.205 inch

 10 ... 12 mm / 0.39 ... 0.47 inch


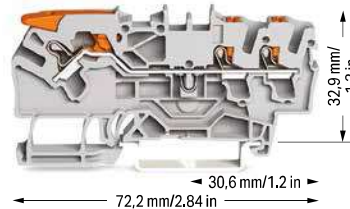
Technical Data

0.25 ... 2.5 (4) mm² ① | 22 ... 12 AWG

800 V/8 kV/3 ②

I_N 24 A (30 A)

Terminal block width: 5.2 mm / 0.205 inch

 10 ... 12 mm / 0.39 ... 0.47 inch


2-conductor through terminal block; with lever and push-button

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2102-5201 | 100 |
| blue | 2102-5204 ③ | 100 |

2-conductor ground terminal block; with lever and push-button

| | | |
|--------------|-----------|-----|
| green-yellow | 2102-5207 | 100 |
|--------------|-----------|-----|

Accessories; item-specific

End and intermediate plate; 0.8 mm thick

| | | |
|--------|-----------|----------|
| orange | 2102-1292 | 100 (25) |
| gray | 2102-1291 | 100 (25) |

Accessories; 2102 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm²

| | | |
|------------|----------|----------|
| light gray | 2002-171 | 200 (25) |
|------------|----------|----------|

Insulation stop; 5 pcs/strip; 0.75 ... 1 mm²

| | | |
|-----------|----------|----------|
| dark gray | 2002-172 | 200 (25) |
|-----------|----------|----------|

Push-in type jumper bar; insulated; I_N 25 A; light gray

| | | |
|--------|----------|----|
| 2-way | 2002-402 | 25 |
| 3-way | 2002-403 | 25 |
| 4-way | 2002-404 | 25 |
| 5-way | 2002-405 | 25 |
| 6-way | 2002-406 | 25 |
| 7-way | 2002-407 | 25 |
| 8-way | 2002-408 | 25 |
| 9-way | 2002-409 | 25 |
| 10-way | 2002-410 | 25 |

Push-in type jumper bar; insulated; I_N 25 A; light gray

| | | |
|---------|----------|----|
| 1 to 3 | 2002-433 | 25 |
| 1 to 4 | 2002-434 | 25 |
| 1 to 5 | 2002-435 | 25 |
| 1 to 6 | 2002-436 | 25 |
| 1 to 7 | 2002-437 | 25 |
| 1 to 8 | 2002-438 | 25 |
| 1 to 9 | 2002-439 | 25 |
| 1 to 10 | 2002-440 | 25 |

Delta jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|-------------|------------------|----|
| 1-2 3-4 5-6 | 2002-406/020-000 | 25 |
|-------------|------------------|----|

3-conductor through terminal block; with lever and push-button

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2102-5301 | 100 |
| blue | 2102-5304 ③ | 100 |

3-conductor ground terminal block; with lever and push-button

| | | |
|--------------|-----------|-----|
| green-yellow | 2102-5307 | 100 |
|--------------|-----------|-----|

Accessories; item-specific

End and intermediate plate; 0.8 mm thick

| | | |
|--------|-----------|----------|
| orange | 2102-1392 | 100 (25) |
| gray | 2102-1391 | 100 (25) |

Adjacent jumper for continuous commoning; insulated; I_N 25 A; light gray

| | | |
|-------|----------|----|
| 2-way | 2002-400 | 25 |
|-------|----------|----|

Adjacent jumper for continuous commoning; insulated; I_N 25 A; 1 to 3

| | | |
|------------|------------------|----|
| light gray | 2002-423 | 25 |
| red | 2002-423/000-005 | 25 |
| blue | 2002-423/000-006 | 25 |

Adjacent jumper for continuous commoning; insulated; I_N 25 A; light gray

| | | |
|-------|----------|----|
| 5-way | 2002-415 | 25 |
|-------|----------|----|

Push-in type wire jumper; insulated; 1.5 mm² conductor cross-section; I_N 18 A

| | | |
|------------|----------|----------|
| L = 60 mm | 2009-412 | 100 (10) |
| L = 110 mm | 2009-414 | 100 (10) |
| L = 250 mm | 2009-416 | 100 (10) |

Staggered jumper; insulated; I_N 25 A; light gray

| | | |
|--------|----------|----|
| 2-way | 2002-472 | 25 |
| 3-way | 2002-473 | 25 |
| 4-way | 2002-474 | 25 |
| 5-way | 2002-475 | 25 |
| 6-way | 2002-476 | 25 |
| 7-way | 2002-477 | 25 |
| 8-way | 2002-478 | 25 |
| 9-way | 2002-479 | 25 |
| 10-way | 2002-480 | 25 |
| 11-way | 2002-481 | 25 |
| 12-way | 2002-482 | 25 |

① Conductor range: 0.25 ... 4 mm² "s+f-st"
Push-in termination: 0.75 ... 4 mm² "s"
and 0.75 ... 2.5 mm²
"insulated ferrules, 12 mm"

② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree

③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

" Please observe the application notes:
Jumpers, from page 146
Testing accessories, from page 140
Marking, from page 230

" Approvals and corresponding ratings,
visit www.wago.com

Accessories; 2102 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Customized staggered jumper; insulated; with contact lugs broken off at the factory and circuit printing; I_N 25 A; light gray

| | | |
|--------------|------------------|----|
| 1-3 | 2002-473/011-000 | 25 |
| 1-3-5 | 2002-475/011-000 | 25 |
| 1-3-5-7 | 2002-477/011-000 | 25 |
| 1-3-5-7-9 | 2002-479/011-000 | 25 |
| 1-3-5-7-9-11 | 2002-481/011-000 | 25 |

Star point jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|-------|------------------|----|
| 1-3-5 | 2002-405/011-000 | 25 |
|-------|------------------|----|

Modular TOPJOB® S connector; snaps together; for jumper contact slot

| | | |
|------|----------|----------|
| gray | 2002-511 | 100 (25) |
|------|----------|----------|

Spacer module; snaps together; bridges commoned terminal blocks

| | | |
|------|----------|----------|
| gray | 2002-549 | 100 (25) |
|------|----------|----------|

End plate; for modular TOPJOB® S connector; 1.5 mm thick

| | | |
|------|----------|----------|
| gray | 2002-541 | 100 (25) |
|------|----------|----------|


WMB Inline, plain; 1,500 WMB markers (5 mm)/reel; 5 ... 5.2 mm stretchable


| | | |
|-------|----------|---|
| white | 2009-115 | 1 |
|-------|----------|---|

Marking strip; plain; 11 mm wide; 50 m reel

| | | |
|-------|----------|---|
| white | 2009-110 | 1 |
|-------|----------|---|



Through and Ground Conductor Terminal Block; with Lever and Push-Button TOPJOB® S; 6 (10) mm²; 2106 Series



| Technical Data | |
|--|--------------|
| 0.5 ... 6 (10) mm ² ① | 20 ... 8 AWG |
| 800 V/8 kV/3 ② | |
| I _N 41 A (55 A) | |
| Terminal block width: 7.5 mm / 0.295 inch | |
|  13 ... 15 mm / 0.51 ... 0.59 inch | |

| Technical Data | |
|---|--------------|
| 0.5 ... 6 (10) mm ² ① | 20 ... 8 AWG |
| 800 V/8 kV/3 ② | |
| I _N 41 A (55 A) | |
| Terminal block width: 7.5 mm / 0.295 inch | |
|  13 ... 15 mm / 0.51 ... 0.59 inch | |

- ① Conductor range: 0.5 ... 10 mm² "s+f-st"
Push-in termination: 1 ... 10 mm² "s"
and 1.5 ... 6 mm²
"insulated ferrules, 12 mm"
- ② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
- ③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.
- " Please observe the application notes:
Jumpers, from page 149
Testing accessories, from page 142
Marking, from page 230
- " Approvals and corresponding ratings,
visit www.wago.com







| 2-conductor through terminal block; with lever and push-button | | |
|---|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2106-5201 | 50 |
|  blue | 2106-5204 ③ | 50 |

| 3-conductor through terminal block; with lever and push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2106-5301 | 25 |
|  blue | 2106-5304 ③ | 25 |





| 2-conductor ground terminal block; with lever and push-button | | |
|---|-----------|----|
|  green-yellow | 2106-5207 | 50 |


| 3-conductor ground terminal block; with lever and push-button | | |
|--|-----------|----|
|  green-yellow | 2106-5307 | 25 |




| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 1 mm thick | | | |
|  | orange | 2106-1292 | 100 (25) |
|  | gray | 2106-1291 | 100 (25) |


| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 1 mm thick | | | |
|  | orange | 2106-1392 | 100 (25) |
|  | gray | 2106-1391 | 100 (25) |


Accessories; 2106 Series
Appropriate marking systems: WMB/WMB Inline/Marking Strips


| Push-in type jumper bar; insulated; I _N 41 A; light gray | | | |
|---|-------|----------|----|
|  | 2-way | 2006-402 | 25 |
|  | 3-way | 2006-403 | 25 |
|  | 4-way | 2006-404 | 25 |
|  | 5-way | 2006-405 | 25 |


| Lockout cap; for conductor entry and operating slot | | |
|---|------|-------------|
|  | gray | 2006-191 25 |


| Push-in type jumper bar; insulated; I _N 41 A; light gray | | | |
|---|--------|----------|----|
|  | 1 to 3 | 2006-433 | 25 |
|  | 1 to 4 | 2006-434 | 25 |
|  | 1 to 5 | 2006-435 | 25 |

| Modular TOPJOB® S connector; snaps together; for jumper contact slot | | |
|---|------|------------------|
|  | gray | 2006-511 50 (25) |

| Star point jumper; insulated; I _N = I _N terminal block; light gray | | | |
|--|-------|------------------|----|
|  | 1-3-5 | 2006-405/011-000 | 25 |

| Test plug adapter; for 4 mm Ø test plug | | |
|---|------|-------------------|
|  | gray | 2009-174 100 (25) |

| Marking strip; plain; 11 mm wide; 50 m reel | | |
|---|-------|------------|
|  | white | 2009-110 1 |

| WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm | | |
|--|-------|------------|
|  | plain | 793-5501 5 |

Through and Ground Conductor Terminal Block; with Lever and Push-Button TOPJOB® S; 16 (25 "f-st") mm²; 2102 Series


Technical Data

0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG

800 V/8 kV/3 ②

I_N 76 A (90 A)

Terminal block width: 12 mm / 0.472 inch

 18 ... 20 mm / 0.71 ... 0.79 inch



Technical Data

0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG

800 V/8 kV/3 ②

I_N 76 A (90 A)

Terminal block width: 12 mm / 0.472 inch

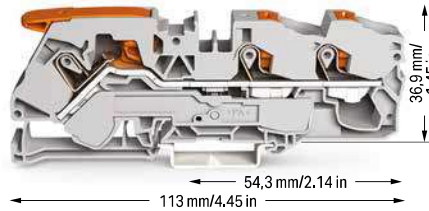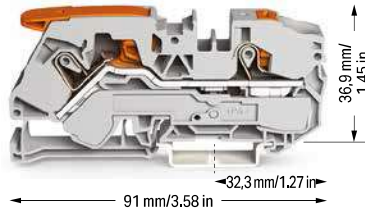 18 ... 20 mm / 0.71 ... 0.79 inch

2-conductor through terminal block; with lever and push-button

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2116-5201 | 20 |
| blue | 2116-5204 ③ | 20 |

3-conductor through terminal block; with lever and push-button

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2116-5301 | 20 |
| blue | 2116-5304 ③ | 20 |

2-conductor ground terminal block; with lever and push-button

| | | |
|--------------|-----------|----|
| green-yellow | 2116-5207 | 20 |
|--------------|-----------|----|

3-conductor ground terminal block; with lever and push-button

| | | |
|--------------|-----------|----|
| green-yellow | 2116-5307 | 20 |
|--------------|-----------|----|

Accessories; item-specific

End and intermediate plate; 1 mm thick

| | | |
|--------|-----------|----------|
| orange | 2116-1292 | 100 (25) |
| gray | 2116-1291 | 100 (25) |

Accessories; item-specific

End and intermediate plate; 1 mm thick

| | | |
|--------|-----------|----------|
| orange | 2116-1392 | 100 (25) |
| gray | 2116-1391 | 100 (25) |

Accessories; 2116 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips


Push-in type jumper bar; insulated; I_N 41 A; light gray

| | | |
|---|----------|----|
|  2-way | 2016-402 | 25 |
|  3-way | 2016-403 | 25 |
|  4-way | 2016-404 | 25 |
|  5-way | 2016-405 | 25 |

Push-in type jumper bar; insulated; I_N 41 A; light gray

| | | |
|--|----------|----|
|  1 to 3 | 2016-433 | 25 |
|  1 to 4 | 2016-434 | 25 |
|  1 to 5 | 2016-435 | 25 |

Star point jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|---|------------------|----|
|  1-3-5 | 2016-405/011-000 | 25 |
|---|------------------|----|

Finger guard; touch-proof cover protects unused conductor entries

| | | |
|--|----------|----------|
|  yellow | 2016-100 | 100 (25) |
|--|----------|----------|

Modular TOPJOB® S connector; snaps together; for jumper contact slot

| | | |
|--|----------|---------|
|  gray | 2016-511 | 50 (25) |
|--|----------|---------|


Test plug adapter; for 4 mm Ø test plug

| | | |
|--|----------|----------|
|  gray | 2009-174 | 100 (25) |
|--|----------|----------|

Marking strip; plain; 11 mm wide; 50 m reel

| | | |
|---|----------|---|
|  white | 2009-110 | 1 |
|---|----------|---|

WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm

| | | |
|---|----------|---|
|  plain | 793-5501 | 5 |
|---|----------|---|

① Conductor range: 0.5 ... 16 mm² "s+f-st", 25 mm² "f-st";
Push-in termination: 2.5 ... 16 mm² "s"
and 2.5 ... 16 mm²
"insulated ferrules, 18 mm"

② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree

③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

" Please observe the application notes:
Jumpers, from page 149
Testing accessories, from page 143
Marking, from page 230




" Approvals and corresponding ratings,
visit www.wago.com

Through and Ground Conductor Terminal Block; with Push-Button TOPJOB® S; 1 (1.5) mm²; 2200 Series

| Technical Data | |
|---|---------------|
| 0.14 ... 1 (1.5) mm ² ① | 24 ... 16 AWG |
| 800 V/8 kV/3 ② | |
| I _N 13.5 A (18 A) | |
| Terminal block width: 3.5 mm / 0.138 inch | |
| 9 ... 11 mm / 0.35 ... 0.43 inch | |

| Technical Data | |
|---|---------------|
| 0.14 ... 1 (1.5) mm ² ① | 24 ... 16 AWG |
| 800 V/8 kV/3 ② | |
| I _N 13.5 A (18 A) | |
| Terminal block width: 3.5 mm / 0.138 inch | |
| 9 ... 11 mm / 0.35 ... 0.43 inch | |

| Technical Data | |
|---|---------------|
| 0.14 ... 1 (1.5) mm ² ① | 24 ... 16 AWG |
| 800 V/8 kV/3 ② | |
| I _N 13.5 A (18 A) | |
| Terminal block width: 3.5 mm / 0.138 inch | |
| 9 ... 11 mm / 0.35 ... 0.43 inch | |



| 2-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack, Unit |
| ○ gray | 2200-1201 | 100 |
| ● blue | 2200-1204 ③ | 100 |

| 3-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack, Unit |
| ○ gray | 2200-1301 | 100 |
| ● blue | 2200-1304 ③ | 100 |

| 4-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack, Unit |
| ○ gray | 2200-1401 | 100 |
| ● blue | 2200-1404 ③ | 100 |

| 2-conductor ground terminal block; with push-button | | |
|---|-----------|-----|
| ● green-yellow | 2200-1207 | 100 |

| 3-conductor ground terminal block; with push-button | | |
|---|-----------|-----|
| ● green-yellow | 2200-1307 | 100 |

| 4-conductor ground terminal block; with push-button | | |
|---|-----------|-----|
| ● green-yellow | 2200-1407 | 100 |

| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 0.7 mm thick | | | |
| orange | 2000-1292 | 100 (25) | |
| gray | 2000-1291 | 100 (25) | |

| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 0.7 mm thick | | | |
| orange | 2000-1392 | 100 (25) | |
| gray | 2000-1391 | 100 (25) | |

| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 0.7 mm thick | | | |
| orange | 2000-1492 | 100 (25) | |
| gray | 2000-1491 | 100 (25) | |

Accessories; 2200 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

| Push-in type jumper bar; insulated; I _N 14 A; light gray | | | |
|---|--------|----------|----|
| | 2-way | 2000-402 | 25 |
| | 3-way | 2000-403 | 25 |
| | 4-way | 2000-404 | 25 |
| | 5-way | 2000-405 | 25 |
| | 6-way | 2000-406 | 25 |
| | 7-way | 2000-407 | 25 |
| | 8-way | 2000-408 | 25 |
| | 9-way | 2000-409 | 25 |
| | 10-way | 2000-410 | 25 |

| Modular TOPJOB® S connector; snaps together; for jumper contact slot | | | |
|--|------|----------|----------|
| Terminal block width: 5 mm / 0.197 inch | | | |
| | gray | 2000-511 | 100 (25) |

| WMB Inline; plain; 2,300 WMB markers (3.5 mm)/reel | | | |
|--|-------|----------|---|
| | white | 2009-113 | 1 |

| Push-in type jumper bar; insulated; I _N 14 A; light gray | | | |
|---|---------|----------|----|
| | 1 to 3 | 2000-433 | 25 |
| | 1 to 4 | 2000-434 | 25 |
| | 1 to 5 | 2000-435 | 25 |
| | 1 to 6 | 2000-436 | 25 |
| | 1 to 7 | 2000-437 | 25 |
| | 1 to 8 | 2000-438 | 25 |
| | 1 to 9 | 2000-439 | 25 |
| | 1 to 10 | 2000-440 | 25 |

| Modular TOPJOB® S connector; snaps together; for jumper contact slot | | | |
|--|------|----------|----------|
| | gray | 2000-510 | 100 (25) |

| Marking strip; plain; 11 mm wide; 50 m reel | | | |
|---|-------|----------|---|
| | white | 2009-110 | 1 |

| Delta jumper; insulated; I _N = I _N terminal block; light gray | | | |
|---|-------------|------------------|----|
| | 1-2 3-4 5-6 | 2000-406/020-000 | 25 |

| Spacer module; snaps together; bridges commoned terminal blocks | | | |
|---|------|----------|----------|
| | gray | 2000-549 | 100 (25) |

| WMB Multi marking system; white; 10 strips with 10 markers/card; for 3.5 mm terminal block width | | | |
|--|-------|----------|---|
| | plain | 793-3501 | 5 |

| Star point jumper; insulated; I _N = I _N terminal block; light gray | | | |
|--|-------|------------------|----|
| | 1-3-5 | 2000-405/011-000 | 25 |

| End plate; for modular TOPJOB® S connector; 1.5 mm thick | | | |
|--|------|----------|----------|
| | gray | 2002-541 | 100 (25) |

| Test plug; with 500 mm cable; 2 mm Ø; max. 42 V | | | |
|---|-----|---------|----|
| | red | 210-136 | 50 |

| Push-in type wire jumper; insulated; 0.75 mm ² conductor cross-section; I _N 9 A | | | |
|---|------------|----------|----------|
| | L = 60 mm | 2009-402 | 100 (10) |
| | L = 110 mm | 2009-404 | 100 (10) |
| | L = 250 mm | 2009-406 | 100 (10) |

| Test plug; with 500 mm cable; 2.3 mm Ø; max. 42 V | | | |
|---|--------|---------|----|
| | yellow | 210-137 | 50 |




- ❶ Conductor range: 0.14 ... 1.5 mm² "s+f-st"
Push-in termination: 0.5 ... 1.5 mm² "s"
and 0.5 ... 0.75 mm²
"insulated ferrules, 10 mm"
- ❷ 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
- ❸ Terminal blocks with a blue insulated housing are suitable for Ex i applications.
- " Please observe the application notes:
Jumpers, from page 146
Testing accessories, from page 140
Marking, from page 230
- " Approvals and corresponding ratings,
visit www.wago.com

Through and Ground Conductor Terminal Block; with Push-Button TOPJOB® S; 1.5 (2.5) mm²; 2201 Series

| Technical Data | |
|---|---------------|
| 0.25 ... 1.5 (2.5) mm ² ① | 22 ... 14 AWG |
| 800 V/8 kV/3 ② | |
| I _N 18 A (24 A) | |
| Terminal block width: 4.2 mm / 0.165 inch | |
| 9 ... 11 mm / 0.35 ... 0.43 inch | |

| Technical Data | |
|---|---------------|
| 0.25 ... 1.5 (2.5) mm ² ① | 22 ... 14 AWG |
| 800 V/8 kV/3 ② | |
| I _N 18 A (24 A) | |
| Terminal block width: 4.2 mm / 0.165 inch | |
| 9 ... 11 mm / 0.35 ... 0.43 inch | |

| Technical Data | |
|---|---------------|
| 0.25 ... 1.5 (2.5) mm ² ① | 22 ... 14 AWG |
| 800 V/8 kV/3 ② | |
| I _N 18 A (24 A) | |
| Terminal block width: 4.2 mm / 0.165 inch | |
| 9 ... 11 mm / 0.35 ... 0.43 inch | |



| 2-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
| gray | 2201-1201 | 100 |
| blue | 2201-1204 ③ | 100 |

| 3-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
| gray | 2201-1301 | 100 |
| blue | 2201-1304 ③ | 100 |

| 4-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
| gray | 2201-1401 | 100 |
| blue | 2201-1404 ③ | 100 |

| 2-conductor ground terminal block; with push-button | | |
|---|-----------|-----|
| green-yellow | 2201-1207 | 100 |

| 3-conductor ground terminal block; with push-button | | |
|---|-----------|-----|
| green-yellow | 2201-1307 | 100 |

| 4-conductor ground terminal block; with push-button | | |
|---|-----------|-----|
| green-yellow | 2201-1407 | 100 |

| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 0.8 mm thick | | | |
| orange | 2002-1292 | 100 (25) | |
| gray | 2002-1291 | 100 (25) | |

| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 0.8 mm thick | | | |
| orange | 2002-1392 | 100 (25) | |
| gray | 2002-1391 | 100 (25) | |

| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 0.8 mm thick | | | |
| orange | 2002-1492 | 100 (25) | |
| gray | 2002-1491 | 100 (25) | |

| Accessories; item-specific | | | |
|----------------------------------|-----------|----------|--|
| Separator; oversized; 2 mm thick | | | |
| orange | 2002-1294 | 100 (25) | |
| gray | 2002-1293 | 100 (25) | |

| Accessories; item-specific | | | |
|----------------------------------|-----------|----------|--|
| Separator; oversized; 2 mm thick | | | |
| orange | 2002-1394 | 100 (25) | |
| gray | 2002-1393 | 100 (25) | |

| Accessories; item-specific | | | |
|----------------------------------|-----------|----------|--|
| Separator; oversized; 2 mm thick | | | |
| orange | 2002-1494 | 100 (25) | |
| gray | 2002-1493 | 100 (25) | |

Accessories; 2201 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

| Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm ² | | | |
|--|----------|----------|--|
| light gray | 2001-171 | 200 (25) | |

| Delta jumper; insulated; I _N = I _N terminal block; light gray | | | |
|---|------------------|----|--|
| 1-2 3-4 5-6 | 2001-406/020-000 | 25 | |

| Test plug adapter; for 4 mm Ø test plug | | | |
|---|----------|----------|--|
| gray | 2009-174 | 100 (25) | |

| Push-in type jumper bar; insulated; I _N 18 A; light gray | | | |
|---|----------|----|--|
| 2-way | 2001-402 | 25 | |
| 3-way | 2001-403 | 25 | |
| 4-way | 2001-404 | 25 | |
| 5-way | 2001-405 | 25 | |
| 6-way | 2001-406 | 25 | |
| 7-way | 2001-407 | 25 | |
| 8-way | 2001-408 | 25 | |
| 9-way | 2001-409 | 25 | |
| 10-way | 2001-410 | 25 | |

| Star point jumper; insulated; I _N = I _N terminal block; light gray | | | |
|--|------------------|----|--|
| 1-3-5 | 2001-405/011-000 | 25 | |

| Banana plug; for 4 mm socket diameter; color mixed; 10 x orange, white, black, blue, yellow; max. 42 V | | | |
|--|---------|----|--|
| | 215-111 | 50 | |

| Push-in type wire jumper; insulated; 1.5 mm ² conductor cross-section; I _N 18 A | | | |
|---|----------|----------|--|
| L = 60 mm | 2009-412 | 100 (10) | |
| L = 110 mm | 2009-414 | 100 (10) | |
| L = 250 mm | 2009-416 | 100 (10) | |

| Testing tap; for max. 2.5 mm ² | | | |
|---|----------|----------|--|
| gray | 2009-182 | 100 (25) | |

| Push-in type jumper bar; insulated; I _N 18 A; light gray | | | |
|---|----------|----|--|
| 1 to 3 | 2001-433 | 25 | |
| 1 to 4 | 2001-434 | 25 | |
| 1 to 5 | 2001-435 | 25 | |
| 1 to 6 | 2001-436 | 25 | |
| 1 to 7 | 2001-437 | 25 | |
| 1 to 8 | 2001-438 | 25 | |
| 1 to 9 | 2001-439 | 25 | |
| 1 to 10 | 2001-440 | 25 | |

| Modular TOPJOB® S connector; snaps together; for jumper contact slot | | | |
|--|----------|----------|--|
| gray | 2001-511 | 100 (25) | |

| Test plug; with 500 mm cable; 2 mm Ø; max. 42 V | | | |
|---|---------|----|--|
| red | 210-136 | 50 | |

| Spacer module; snaps together; bridges commoned terminal blocks | | | |
|---|----------|----------|--|
| gray | 2001-549 | 100 (25) | |

| Test plug; with 500 mm cable; 2.3 mm Ø; max. 42 V | | | |
|---|---------|----|--|
| yellow | 210-137 | 50 | |

| End plate; for modular TOPJOB® S connector; 1.5 mm thick | | | |
|--|----------|----------|--|
| gray | 2001-541 | 100 (25) | |


| WMB Inline; plain; 2,000 WMB markers (4 mm)/reel; 4 ... 4.2 mm stretchable | | | |
|--|----------|---|--|
| white | 2009-114 | 1 | |

- ❶ Conductor range: 0.25 ... 2.5 mm² "s+f-st"
Push-in termination: 0.5 ... 2.5 mm² "s"
and 0.75 ... 1.5 mm²
"insulated ferrules, 12 mm"
 - ❷ 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
 - ❸ Terminal blocks with a blue insulated housing are suitable for Ex i applications.
- " Please observe the application notes:
Jumpers, from page 149
Testing accessories, from page 140
Marking, from page 230
- " Approvals and corresponding ratings,
visit www.wago.com


Accessories; 2201 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Marking strip; plain; 11 mm wide; 50 m reel

| | | | |
|---|-------|----------|---|
|  | white | 2009-110 | 1 |
|---|-------|----------|---|

WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 4 ... 4.2 mm

| | | | |
|---|-------|----------|---|
|  | plain | 793-4501 | 5 |
|---|-------|----------|---|

WMB Multi marking system; plain; 10 strips with 10 markers/card; stretchable from 4 ... 4.2 mm

| | | | |
|---|-------------|------------------|---|
|  | yellow | 793-4501/000-002 | 5 |
| | red | 793-4501/000-005 | 5 |
| | blue | 793-4501/000-006 | 5 |
| | gray | 793-4501/000-007 | 5 |
| | orange | 793-4501/000-012 | 5 |
| | light green | 793-4501/000-017 | 5 |
| | green | 793-4501/000-023 | 5 |
| | violet | 793-4501/000-024 | 5 |


Screwless end stop; for DIN-35 rail; 6 mm wide


| | | | |
|---|------|---------|----------|
|  | gray | 249-116 | 100 (25) |
|---|------|---------|----------|


Screwless end stop; for DIN-35 rail; 10 mm wide



| | | | |
|---|------|---------|---------|
|  | gray | 249-117 | 50 (25) |
|---|------|---------|---------|



Through and Ground Conductor Terminal Block; with Push-Button TOPJOB® S; 2.5 (4) mm²; 2202 Series



| Technical Data | |
|--|---------------|
| 0.25 ... 2.5 (4) mm ² ① | 22 ... 12 AWG |
| 800 V/8 kV/3 ② | |
| I _N 24 A (32 A) | |
| Terminal block width: 5.2 mm / 0.205 inch | |
|  10 ... 12 mm / 0.39 ... 0.47 inch | |

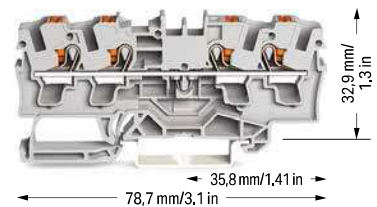

| Technical Data | |
|---|---------------|
| 0.25 ... 2.5 (4) mm ² ① | 22 ... 12 AWG |
| 800 V/8 kV/3 ② | |
| I _N 24 A (32 A) | |
| Terminal block width: 5.2 mm / 0.205 inch | |
|  10 ... 12 mm / 0.39 ... 0.47 inch | |


| Technical Data | |
|---|---------------|
| 0.25 ... 2.5 (4) mm ² ① | 22 ... 12 AWG |
| 800 V/8 kV/3 ② | |
| I _N 24 A (32 A) | |
| Terminal block width: 5.2 mm / 0.205 inch | |
|  10 ... 12 mm / 0.39 ... 0.47 inch | |





| 2-conductor through terminal block; with push-button | | |
|---|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2202-1201 | 100 |
|  blue | 2202-1204 ③ | 100 |



| 3-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2202-1301 | 100 |
|  blue | 2202-1304 ③ | 100 |



| 4-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2202-1401 | 100 |
|  blue | 2202-1404 ③ | 100 |



| 2-conductor ground terminal block; with push-button | | |
|---|-----------|-----|
|  green-yellow | 2202-1207 | 100 |



| 3-conductor ground terminal block; with push-button | | |
|--|-----------|-----|
|  green-yellow | 2202-1307 | 100 |



| 4-conductor ground terminal block; with push-button | | |
|--|-----------|-----|
|  green-yellow | 2202-1407 | 100 |



| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 0.8 mm thick | | | |
|  | orange | 2002-1292 | 100 (25) |
|  | gray | 2002-1291 | 100 (25) |

| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 0.8 mm thick | | | |
|  | orange | 2002-1392 | 100 (25) |
|  | gray | 2002-1391 | 100 (25) |

| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 0.8 mm thick | | | |
|  | orange | 2002-1492 | 100 (25) |
|  | gray | 2002-1491 | 100 (25) |

| Separator; oversized; 2 mm thick | | | |
|---|--------|-----------|----------|
|  | orange | 2002-1294 | 100 (25) |
|  | gray | 2002-1293 | 100 (25) |


| Separator; oversized; 2 mm thick | | | |
|---|--------|-----------|----------|
|  | orange | 2002-1394 | 100 (25) |
|  | gray | 2002-1393 | 100 (25) |


| Separator; oversized; 2 mm thick | | | |
|---|--------|-----------|----------|
|  | orange | 2002-1494 | 100 (25) |
|  | gray | 2002-1493 | 100 (25) |


Accessories; 2202 Series


Appropriate marking systems: WMB/WMB Inline/Marking Strips


| Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm ² | | | |
|---|------------|----------|----------|
|  | light gray | 2002-171 | 200 (25) |


| Delta jumper; insulated; I _N = I _N terminal block; light gray | | | |
|---|-------------|------------------|----|
|  | 1-2 3-4 5-6 | 2002-406/020-000 | 25 |




| Staggered jumper; insulated; I _N 25 A; light gray | | | |
|---|--------|----------|----|
|  | 2-way | 2002-472 | 25 |
| | 3-way | 2002-473 | 25 |
| | 4-way | 2002-474 | 25 |
| | 5-way | 2002-475 | 25 |
| | 6-way | 2002-476 | 25 |
| | 7-way | 2002-477 | 25 |
| | 8-way | 2002-478 | 25 |
| | 9-way | 2002-479 | 25 |
| | 10-way | 2002-480 | 25 |
| | 11-way | 2002-481 | 25 |
| | 12-way | 2002-482 | 25 |


| Insulation stop; 5 pcs/strip; 0.75 ... 1 mm ² | | | |
|---|-----------|----------|----------|
|  | dark gray | 2002-172 | 200 (25) |


| Star point jumper; insulated; I _N = I _N terminal block; light gray | | | |
|--|-------|------------------|----|
|  | 1-3-5 | 2002-405/011-000 | 25 |


| Push-in type jumper bar; insulated; I _N 25 A; light gray | | | |
|---|--------|----------|----|
|  | 2-way | 2002-402 | 25 |
| | 3-way | 2002-403 | 25 |
| | 4-way | 2002-404 | 25 |
| | 5-way | 2002-405 | 25 |
| | 6-way | 2002-406 | 25 |
| | 7-way | 2002-407 | 25 |
| | 8-way | 2002-408 | 25 |
| | 9-way | 2002-409 | 25 |
| | 10-way | 2002-410 | 25 |


| Adjacent jumper for continuous commoning; insulated; I _N 25 A, light gray | | | |
|--|-------|----------|----|
|  | 2-way | 2002-400 | 25 |

| Adjacent jumper for continuous commoning; insulated; I _N 25 A; 1 to 3 | | | |
|---|------------|------------------|----|
|  | light gray | 2002-423 | 25 |
|  | red | 2002-423/000-005 | 25 |
|  | blue | 2002-423/000-006 | 25 |

| Customized staggered jumper; insulated; with contact lugs broken off at the factory and circuit printing; I _N 25 A; light gray | | | |
|---|--------------|------------------|----|
|  | 1-3 | 2002-473/011-000 | 25 |
| | 1-3-5 | 2002-475/011-000 | 25 |
| | 1-3-5-7 | 2002-477/011-000 | 25 |
| | 1-3-5-7-9 | 2002-479/011-000 | 25 |
| | 1-3-5-7-9-11 | 2002-481/011-000 | 25 |

| Push-in type jumper bar; insulated; I _N 25 A; light gray | | | |
|---|---------|----------|----|
|  | 1 to 3 | 2002-433 | 25 |
| | 1 to 4 | 2002-434 | 25 |
| | 1 to 5 | 2002-435 | 25 |
| | 1 to 6 | 2002-436 | 25 |
| | 1 to 7 | 2002-437 | 25 |
| | 1 to 8 | 2002-438 | 25 |
| | 1 to 9 | 2002-439 | 25 |
| | 1 to 10 | 2002-440 | 25 |

| Adjacent jumper for continuous commoning; insulated; I _N 25 A, light gray | | | |
|--|-------|----------|----|
|  | 5-way | 2002-415 | 25 |


| Push-in type wire jumper; insulated; 1.5 mm ² conductor cross-section; I _N 18 A | | | |
|---|------------|----------|----------|
|  | L = 60 mm | 2009-412 | 100 (10) |
| | L = 110 mm | 2009-414 | 100 (10) |
| | L = 250 mm | 2009-416 | 100 (10) |

- ❶ Conductor range: 0.25 ... 4 mm² "s+f-st"
Push-in termination: 0.75 ... 4 mm² "s"
and 0.75 ... 2.5 mm²
"insulated ferrules, 12 mm"
 - ❷ 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
 - ❸ Terminal blocks with a blue insulated housing are suitable for Ex i applications.
- " Please observe the application notes:
Jumpers, from page 146
Testing accessories, from page 140
Marking, from page 230
- " Approvals and corresponding ratings,
visit www.wago.com


Accessories; 2202 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Modular TOPJOB® S connector; snaps together; for jumper contact slot

| | | | |
|---|------|----------|----------|
|  | gray | 2002-511 | 100 (25) |
|---|------|----------|----------|


Spacer module; snaps together; bridges commoned terminal blocks

| | | | |
|--|------|----------|----------|
|  | gray | 2002-549 | 100 (25) |
|--|------|----------|----------|


End plate; for modular TOPJOB® S connector; 1,5 mm thick

| | | | |
|---|------|----------|----------|
|  | gray | 2002-541 | 100 (25) |
|---|------|----------|----------|

WMB Inline, plain; 1,500 WMB markers (5 mm)/reel; 5 ... 5.2 mm stretchable

| | | | |
|---|-------|----------|---|
|  | white | 2009-115 | 1 |
|---|-------|----------|---|


Marking strip; plain; 11 mm wide; 50 m reel


| | | | |
|---|-------|----------|---|
|  | white | 2009-110 | 1 |
|---|-------|----------|---|


WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm




| | | | |
|---|-------|----------|---|
|  | plain | 793-5501 | 5 |
|---|-------|----------|---|



Through and Ground Conductor Terminal Block; with Push-Button TOPJOB® S; 4 (6) mm²; 2204 Series



| Technical Data | |
|--|---------------|
| 0.5 ... 4 (6) mm ² ① | 20 ... 10 AWG |
| 800 V/8 kV/3 ② | |
| I _N 32 A (41 A) | |
| Terminal block width: 6.2 mm / 0.244 inch | |
|  11 ... 13 mm / 0.43 ... 0.51 inch | |

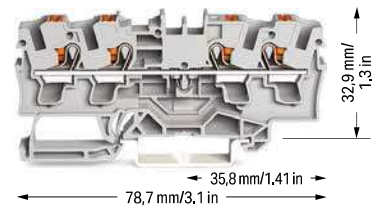

| Technical Data | |
|---|---------------|
| 0.5 ... 4 (6) mm ² ① | 20 ... 10 AWG |
| 800 V/8 kV/3 ② | |
| I _N 32 A (41 A) | |
| Terminal block width: 6.2 mm / 0.244 inch | |
|  11 ... 13 mm / 0.43 ... 0.51 inch | |


| Technical Data | |
|---|---------------|
| 0.5 ... 4 (6) mm ² ① | 20 ... 10 AWG |
| 800 V/8 kV/3 ② | |
| I _N 32 A (41 A) | |
| Terminal block width: 6.2 mm / 0.244 inch | |
|  11 ... 13 mm / 0.43 ... 0.51 inch | |





| 2-conductor through terminal block; with push-button | | |
|---|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2204-1201 | 50 |
|  blue | 2204-1204 ③ | 50 |



| 3-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2204-1301 | 50 |
|  blue | 2204-1304 ③ | 50 |



| 4-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2204-1401 | 50 |
|  blue | 2204-1404 ③ | 50 |



| 2-conductor ground terminal block; with push-button | | |
|---|-----------|----|
|  green-yellow | 2204-1207 | 50 |



| 3-conductor ground terminal block; with push-button | | |
|--|-----------|----|
|  green-yellow | 2204-1307 | 50 |



| 4-conductor ground terminal block; with push-button | | |
|--|-----------|----|
|  green-yellow | 2204-1407 | 50 |



| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 1 mm thick | | | |
|  | orange | 2004-1292 | 100 (25) |
|  | gray | 2004-1291 | 100 (25) |

| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 1 mm thick | | | |
|  | orange | 2004-1392 | 100 (25) |
|  | gray | 2004-1391 | 100 (25) |

| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| End and intermediate plate; 1 mm thick | | | |
|  | orange | 2004-1492 | 100 (25) |
|  | gray | 2004-1491 | 100 (25) |


| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| Separator; oversized; 2 mm thick | | | |
|  | orange | 2004-1294 | 100 (25) |
|  | gray | 2004-1293 | 100 (25) |


| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| Separator; oversized; 2 mm thick | | | |
|  | orange | 2004-1394 | 100 (25) |
|  | gray | 2004-1393 | 100 (25) |


| Accessories; item-specific | | | |
|---|--------|-----------|----------|
| Separator; oversized; 2 mm thick | | | |
|  | orange | 2004-1494 | 100 (25) |
|  | gray | 2004-1493 | 100 (25) |

Accessories; 2204 Series


Appropriate marking systems: WMB/WMB Inline/Marking Strips


| Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm ² | | | |
|---|------------|----------|----------|
|  | light gray | 2004-171 | 200 (25) |










| Star point jumper; insulated; I _N = I _N terminal block; light gray | | | |
|--|-------|------------------|----|
|  | 1-3-5 | 2004-405/011-000 | 25 |


| Banana plug; for 4 mm socket diameter; color mixed; 10 x orange, white, black, blue, yellow; max. 42 V | | | |
|--|--|---------|----|
|  | | 215-111 | 50 |


| Insulation stop; 5 pcs/strip; 0.75 ... 1 mm ² | | | |
|---|-----------|----------|----------|
|  | dark gray | 2004-172 | 200 (25) |









| Delta jumper; insulated; I _N = I _N terminal block; light gray | | | |
|---|-------------|------------------|----|
|  | 1-2 3-4 5-6 | 2004-406/020-000 | 25 |

| Testing tap; for max. 2.5 mm ² | | | |
|---|------|----------|----------|
|  | gray | 2009-182 | 100 (25) |


| Push-in type jumper bar; insulated; I _N 32 A; light gray | | | |
|---|--------|----------|----|
|  | 2-way | 2004-402 | 25 |
|  | 3-way | 2004-403 | 25 |
|  | 4-way | 2004-404 | 25 |
|  | 5-way | 2004-405 | 25 |
|  | 6-way | 2004-406 | 25 |
|  | 7-way | 2004-407 | 25 |
|  | 8-way | 2004-408 | 25 |
|  | 9-way | 2004-409 | 25 |
|  | 10-way | 2004-410 | 25 |


| Modular TOPJOB® S connector; snaps together; for jumper contact slot | | | |
|---|------|----------|----------|
|  | gray | 2004-511 | 100 (25) |

| Marking strip; plain; 11 mm wide; 50 m reel | | | |
|---|-------|----------|---|
|  | white | 2009-110 | 1 |

| Push-in type jumper bar; insulated; I _N 32 A; light gray | | | |
|---|---------|----------|----|
|  | 1 to 3 | 2004-433 | 25 |
|  | 1 to 4 | 2004-434 | 25 |
|  | 1 to 5 | 2004-435 | 25 |
|  | 1 to 6 | 2004-436 | 25 |
|  | 1 to 7 | 2004-437 | 25 |
|  | 1 to 8 | 2004-438 | 25 |
|  | 1 to 9 | 2004-439 | 25 |
|  | 1 to 10 | 2004-440 | 25 |

| Spacer module; snaps together; bridges commoned terminal blocks | | | |
|---|------|----------|----------|
|  | gray | 2004-549 | 100 (25) |

| WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm | | | |
|--|-------|----------|---|
|  | plain | 793-5501 | 5 |

| End plate; for modular TOPJOB® S connector; 1.5 mm thick | | | |
|---|------|----------|----------|
|  | gray | 2004-541 | 100 (25) |

| TOPJOB® S group marker carrier; snap-on type for jumper slot; 5 mm wide | | | |
|---|------|----------|---------|
|  | gray | 2009-191 | 50 (25) |

| Test plug adapter; for 4 mm Ø test plug | | | |
|---|------|----------|----------|
|  | gray | 2009-174 | 100 (25) |

❶ Conductor range: 0.5 ... 6 mm² "s+f-st"
Push-in termination: 1 ... 6 mm² "s"
and 0.75 ... 4 mm²
"insulated ferrules, 12 mm"


❷ 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree


❸ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

" Please observe the application notes:
Jumpers, from page 149
Testing accessories, from page 142
Marking, from page 230



" Approvals and corresponding ratings,
visit www.wago.com



Through and Ground Conductor Terminal Block; with Push-Button TOPJOB® S; 6 (10) mm²; 2206 Series



| Technical Data | |
|--|--------------|
| 0.5 ... 6 (10) mm ² ① | 20 ... 8 AWG |
| 800 V/8 kV/3 ② | |
| I _N 41 A (57 A) | |
| Terminal block width: 7.5 mm / 0.295 inch | |
|  13 ... 15 mm / 0.51 ... 0.59 inch | |


| Technical Data | |
|---|--------------|
| 0.5 ... 6 (10) mm ² ① | 20 ... 8 AWG |
| 800 V/8 kV/3 ② | |
| I _N 41 A (57 A) | |
| Terminal block width: 7.5 mm / 0.295 inch | |
|  13 ... 15 mm / 0.51 ... 0.59 inch | |


- ① Conductor range: 0.5 ... 10 mm² "s+f-st"
Push-in termination: 1 ... 10 mm² "s"
and 1.5 ... 6 mm²
"insulated ferrules, 12 mm"
- ② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
- ③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.
- " Please observe the application notes:
Jumpers, from page 149
Testing accessories, from page 142
Marking, from page 230
- " Approvals and corresponding ratings,
visit www.wago.com







| 2-conductor through terminal block; with push-button | | |
|---|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2206-1201 | 50 |
|  blue | 2206-1204 ③ | 50 |



| 3-conductor through terminal block; with push-button | | |
|--|-------------|------------|
| Color | Item No. | Pack. Unit |
|  gray | 2206-1301 | 25 |
|  blue | 2206-1304 ③ | 25 |


| 2-conductor ground terminal block; with push-button | | |
|---|-----------|----|
|  green-yellow | 2206-1207 | 50 |

| 3-conductor ground terminal block; with push-button | | |
|--|-----------|----|
|  green-yellow | 2206-1307 | 25 |

| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 1 mm thick | | | |
|  orange | 2006-1292 | 100 (25) | |
|  gray | 2006-1291 | 100 (25) | |





| Accessories; item-specific | | | |
|--|-----------|----------|--|
| End and intermediate plate; 1 mm thick | | | |
|  orange | 2006-1392 | 100 (25) | |
|  gray | 2006-1391 | 100 (25) | |


| Separator; oversized; 2 mm thick | | | |
|--|-----------|----------|--|
|  orange | 2006-1294 | 100 (25) | |
|  gray | 2006-1293 | 100 (25) | |




| Separator; oversized; 2 mm thick | | | |
|--|-----------|----------|--|
|  orange | 2006-1394 | 100 (25) | |
|  gray | 2006-1393 | 100 (25) | |


Accessories; 2206 Series


Appropriate marking systems: WMB/WMB Inline/Marking Strips


| Push-in type jumper bar; insulated; I _N 41 A; light gray | | | |
|---|----------|----|--|
|  2-way | 2006-402 | 25 | |
|  3-way | 2006-403 | 25 | |
|  4-way | 2006-404 | 25 | |
|  5-way | 2006-405 | 25 | |


| Modular TOPJOB® S connector; snaps together; for jumper contact slot | | | |
|--|----------|---------|--|
|  gray | 2006-511 | 50 (25) | |

| Push-in type jumper bar; insulated; I _N 41 A; light gray | | | |
|--|----------|----|--|
|  1 to 3 | 2006-433 | 25 | |
|  1 to 4 | 2006-434 | 25 | |
|  1 to 5 | 2006-435 | 25 | |

| Test plug adapter; for 4 mm Ø test plug | | | |
|--|----------|----------|--|
|  gray | 2009-174 | 100 (25) | |

| Star point jumper; insulated; I _N = I _N terminal block; light gray | | | |
|---|------------------|----|--|
|  1-3-5 | 2006-405/011-000 | 25 | |

| Marking strip; plain; 11 mm wide; 50 m reel | | | |
|---|----------|---|--|
|  white | 2009-110 | 1 | |

| WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm | | | |
|--|----------|---|--|
|  plain | 793-5501 | 5 | |

Through and Ground Conductor Terminal Block; with Push-Button TOPJOB® S; 10 (16) mm²; 2210 Series

Technical Data

0.5 ... 10 (16) mm² ① | 20 ... 6 AWG

800 V/8 kV/3 ②

I_N 57 A (76 A)

Terminal block width: 10 mm / 0.394 inch

 17 ... 19 mm / 0.67 ... 0.91 inch



Technical Data

0.5 ... 10 (16) mm² ① | 20 ... 6 AWG

800 V/8 kV/3 ②

I_N 57 A (76 A)

Terminal block width: 10 mm / 0.394 inch

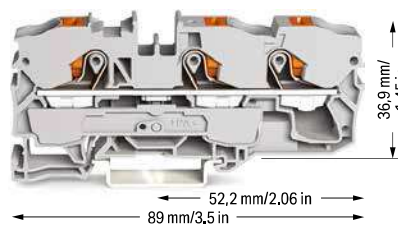 17 ... 19 mm / 0.67 ... 0.91 inch

2-conductor through terminal block; with push-button

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2210-1201 | 25 |
| blue | 2210-1204 ③ | 25 |

3-conductor through terminal block; with push-button

| Color | Item No. | Pack. Unit |
|-------|-------------|------------|
| gray | 2210-1301 | 25 |
| blue | 2210-1304 ③ | 25 |

2-conductor ground terminal block; with push-button

| | | |
|--------------|-----------|----|
| green-yellow | 2210-1207 | 25 |
|--------------|-----------|----|

3-conductor ground terminal block; with push-button

| | | |
|--------------|-----------|----|
| green-yellow | 2210-1307 | 25 |
|--------------|-----------|----|

Accessories; item-specific

End and intermediate plate; 1 mm thick

| | | |
|--------|-----------|----------|
| orange | 2010-1292 | 100 (25) |
| gray | 2010-1291 | 100 (25) |

Accessories; item-specific

End and intermediate plate; 1 mm thick

| | | |
|--------|-----------|----------|
| orange | 2010-1392 | 100 (25) |
| gray | 2010-1391 | 100 (25) |

Accessories; 2210 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips


Push-in type jumper bar; insulated; I_N 57 A; light gray

| | | |
|---|----------|----|
|  2-way | 2010-402 | 25 |
|  3-way | 2010-403 | 25 |
|  4-way | 2010-404 | 25 |
|  5-way | 2010-405 | 25 |


Push-in type jumper bar; insulated; I_N 57 A; light gray

| | | |
|--|----------|----|
|  1 to 3 | 2010-433 | 25 |
|  1 to 4 | 2010-434 | 25 |
|  1 to 5 | 2010-435 | 25 |

Star point jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|---|------------------|----|
|  1-3-5 | 2010-405/011-000 | 25 |
|---|------------------|----|

Finger guard; touch-proof cover protects unused conductor entries

| | | |
|--|----------|----------|
|  yellow | 2010-100 | 100 (25) |
|--|----------|----------|

Modular TOPJOB® S connector; snaps together; for jumper contact slot

| | | |
|--|----------|---------|
|  gray | 2010-511 | 50 (25) |
|--|----------|---------|


Test plug adapter; for 4 mm Ø test plug

| | | |
|--|----------|----------|
|  gray | 2009-174 | 100 (25) |
|--|----------|----------|

Marking strip; plain; 11 mm wide; 50 m reel

| | | |
|---|----------|---|
|  white | 2009-110 | 1 |
|---|----------|---|

WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm

| | | |
|---|----------|---|
|  plain | 793-5501 | 5 |
|---|----------|---|

① Conductor range: 0.5 ... 16 mm² "s+f-st"
Push-in termination: 2.5 ... 16 mm² "s"
and 2.5 ... 10 mm²
"insulated ferrules, 18 mm"

② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree


③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

" Please observe the application notes:
Jumpers, from page 149
Testing accessories, from page 142
Marking, from page 230


" Approvals and corresponding ratings,
visit www.wago.com

Through and Ground Conductor Terminal Block; with Push-Button TOPJOB® S; 16 (25 "f-st") mm²; 2216 Series

Technical Data

0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG
 800 V/8 kV/3 ②
 I_N 76 A (90 A)
 Terminal block width: 12 mm / 0.472 inch
 18 ... 20 mm / 0.71 ... 0.79 inch



Technical Data

0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG
 800 V/8 kV/3 ②
 I_N 76 A (90 A)
 Terminal block width: 12 mm / 0.472 inch
 18 ... 20 mm / 0.71 ... 0.79 inch



- ① Conductor range: 0.5 ... 16 mm² "s+f-st", 25 mm² "f-st"; Push-in termination: 2.5 ... 16 mm² "s" and 2.5 ... 16 mm² "insulated ferrules, 18 mm"
 - ② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
 - ③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.
- " Please observe the application notes:
 Jumpers, from page 149
 Testing accessories, from page 143
 Marking, from page 230
- " Approvals and corresponding ratings, visit www.wago.com




2-conductor through terminal block; with push-button

| Color | Item No. | Pack. Unit |
|---|-------------|------------|
|  gray | 2216-1201 | 20 |
|  blue | 2216-1204 ③ | 20 |


3-conductor through terminal block; with push-button

| Color | Item No. | Pack. Unit |
|--|-------------|------------|
|  gray | 2216-1301 | 20 |
|  blue | 2216-1304 ③ | 20 |

2-conductor ground terminal block; with push-button


| | | |
|---|-----------|----|
|  green-yellow | 2216-1207 | 50 |
|---|-----------|----|

3-conductor ground terminal block; with push-button

| | | |
|--|-----------|----|
|  green-yellow | 2216-1307 | 20 |
|--|-----------|----|

Accessories; item-specific

End and intermediate plate; 1 mm thick

| | | |
|---|-----------|----------|
|  orange | 2016-1292 | 100 (25) |
|  gray | 2016-1291 | 100 (25) |

Accessories; item-specific




End and intermediate plate; 1 mm thick

| | | |
|--|-----------|----------|
|  orange | 2016-1392 | 100 (25) |
|  gray | 2016-1391 | 100 (25) |

Accessories; 2216 Series

Appropriate marking systems: WMB/WMB Inline/Marking Strips

Push-in type jumper bar; insulated; I_N 41 A; light gray

| | | |
|--|----------|----|
|  2-way | 2016-402 | 25 |
|  3-way | 2016-403 | 25 |
|  4-way | 2016-404 | 25 |
|  5-way | 2016-405 | 25 |

Finger guard; touch-proof cover protects unused conductor entries

| | | |
|--|----------|----------|
|  yellow | 2016-100 | 100 (25) |
|--|----------|----------|


Push-in type jumper bar; insulated; I_N 41 A; light gray

| | | |
|---|----------|----|
|  1 to 3 | 2016-433 | 25 |
|  1 to 4 | 2016-434 | 25 |
|  1 to 5 | 2016-435 | 25 |

Modular TOPJOB® S connector; snaps together; for jumper contact slot

| | | |
|--|----------|---------|
|  gray | 2016-511 | 50 (25) |
|--|----------|---------|

Star point jumper; insulated; I_N = I_N terminal block; light gray

| | | |
|--|------------------|----|
|  1-3-5 | 2016-405/011-000 | 25 |
|--|------------------|----|


Test plug adapter; for 4 mm Ø test plug

| | | |
|--|----------|----------|
|  gray | 2009-174 | 100 (25) |
|--|----------|----------|

Marking strip; plain; 11 mm wide; 50 m reel

| | | |
|---|----------|---|
|  white | 2009-110 | 1 |
|---|----------|---|

WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm

| | | |
|---|----------|---|
|  plain | 793-5501 | 5 |
|---|----------|---|

